
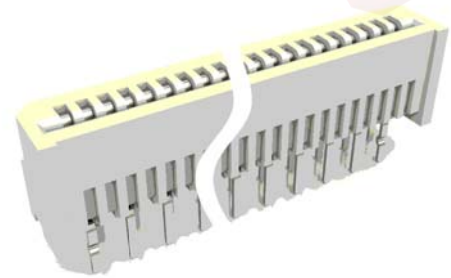
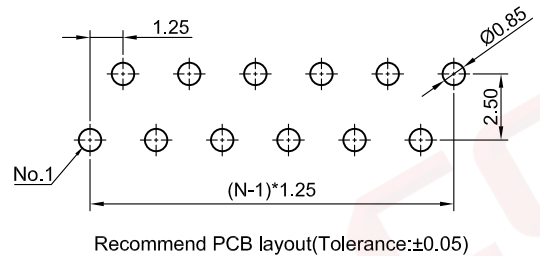

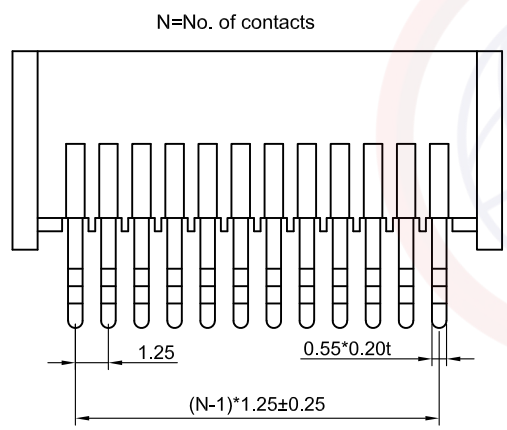


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

1 2 3 4 5 6 7 8

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 09/04/08'		LJC 09/04/08'
C	DRAWING UPDATE	JLZ 09/13/17'	JLZ 09/13/17'	JLZ 09/13/17'
D	DRAWING UPDATE	JLZ 08/31/18'		
E	DRAWING UPDATE	JLZ 12/27/23'		

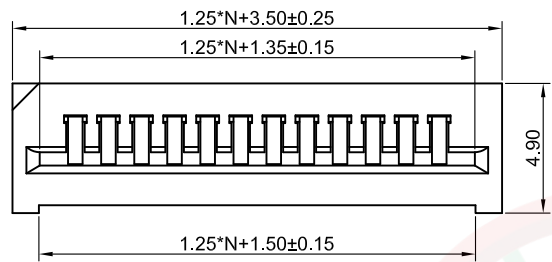

(Series Image-Reference Only)

NOTES:

1. Materials
 - 1.1 Insulator:Thermoplastic(UL 94V-0).
 - 1.2 Contact:Copper alloy.
2. Specification
 - 2.1 Temperature range:-20--+85°C.
 - 2.2 Contact resistance:20mΩ max.
 - 2.3 Insulation resistance:500MΩ min.
 - 2.4 Dielectric withstanding voltage:AC 250V per minute.
3. Product number code:

DS1020-01- X X X

 - X X X Contact plating
 - T1: Tin
 - Housing color
 - V: Ivory
 - No. of contacts
 - 04-32

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	1.25mm FPC CONNECTOR V/T TYPE		
X.	±0.60	X.	±5°	UNITS	mm	SHEET SIZE	A4		
.X	±0.38	.X	±3°			SERIES	DS1020-01 SERIES		
.XX	±0.25	.XX	±2°						
DRAWING TYPE		CUSTOMER		晨翔电子有限公司 CONNELY CONNELY ELECTRONIC CO. LTD					
SCALE		1:1	SHEET						1 OF 1
DRAWING NO.		C-DS1020-01-XXX-E							

1 2 3 4 5 6 7 8