
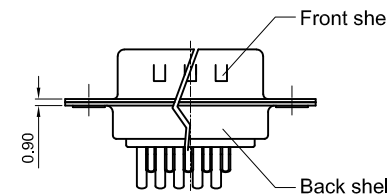
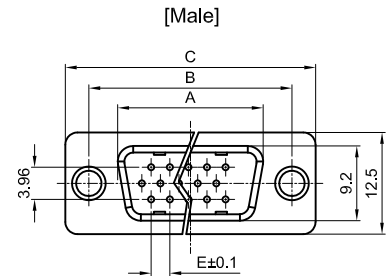
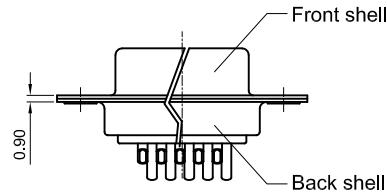





The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of any part of this document, in any form or manner, CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

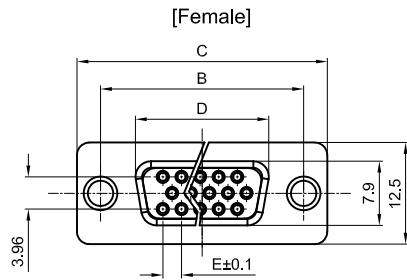

(Series Image-Reference Only)

Dimension

Position	A±0.2	B±0.2	C±0.3	D	E
15	17.90	24.99	30.80	16.33	2.29
26	26.50	33.32	39.14	24.66	2.29
44	40.00	47.04	53.04	38.38	2.29
62	56.50	63.50	69.32	54.84	2.41
78	54.30	61.00	67.04	52.34	2.41

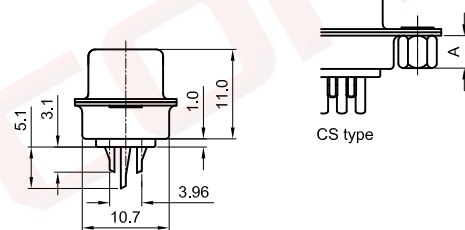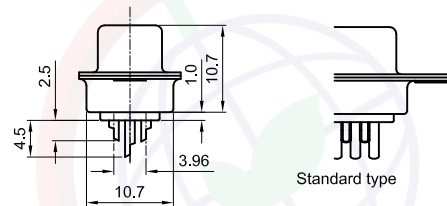

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 09/26/05'		LJC 09/26/05'
B	整理图面	YCH 05/26/07'		LJC 05/26/07'
C	增加锁螺丝类型	YCH 06/30/07'		LJC 06/30/07'
D	DRAWING UPDATE	JLZ 08/08/18'		

Notes:

Specifications:

- Contact Resistance: 20mΩ Max.
- Insulation Resistance: 1000MΩ Min.
- Dielectric Withstanding Voltage: 500V AC(rms) For 1 Minute.
- Current Rating:3A.
- Voltage (MAX):350V.
- Temperature: -40°C~+105°C.

Materials:

- Contact Material: Copper Alloy.
- Shell Material: Steel.
- Insulator Material: Thermoplastic,Black,Blue or White.

Product Number Code:

DS1035- X X X X X X

Screw DIM. A
S: Standard(W/O nut)

- 1: 3.00
2: 4.00
3: 4.50
4: 5.00
5: 5.50
6: 5.80

Screw type
S: Standard(W/O nut)

- 1: CC type
2: CS type

Contact plating
8: Full gold flash
Si: Selective gold flash

Shell plating
T: Fornt & Back shell tin
N: Fornt shell nickel,Back shell tin

Housing color
B: Black
W: White
U: Blue

Connector type
M: Male
F: Female

No.of contacts
15: 15pos. 26: 26pos.
44: 44pos. 62: 62pos.

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1035-XXXXXXX-D		





PROJECTION		TITLE	D-SUB H.D SOLDER TYPE	
UNITS	mm			
SHEET SIZE	A4	SERIES	DS1035 SERIES	




晨翔电子有限公司
CONNFLY CONNELY ELECTRONIC CO. LTD

Dept
Qty
DC 1
ED 1
IE 1
ISO 1
PD 1
R&D 1
SD 1
QA 1
QC 1
QE 1

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of this document in any form or by any means, electronic or mechanical, including photocopying, recording, or by any information storage and retrieval system, without the prior written permission of CONNELY is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

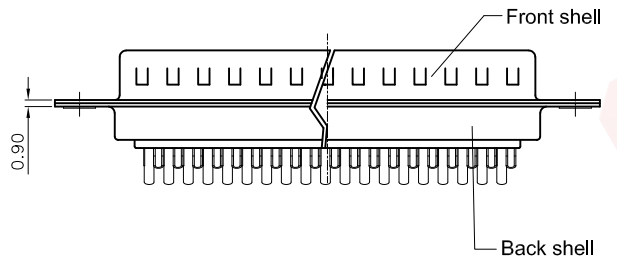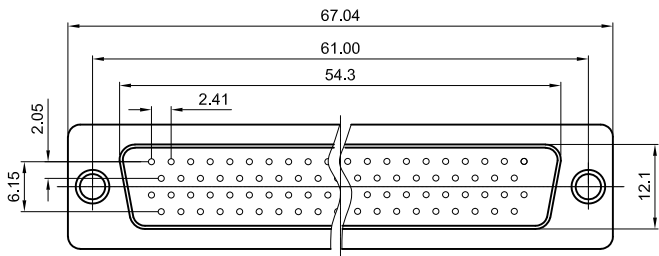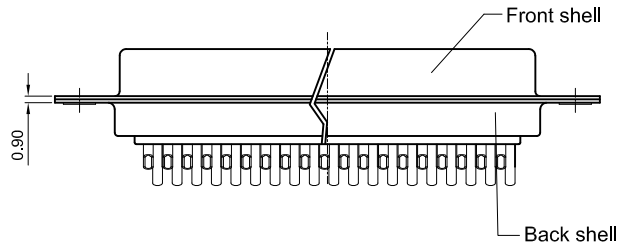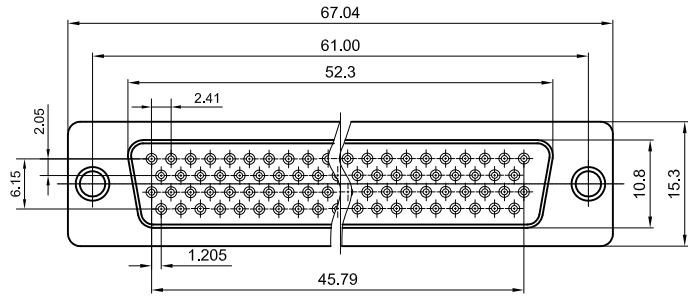

(Series Image-Reference Only)

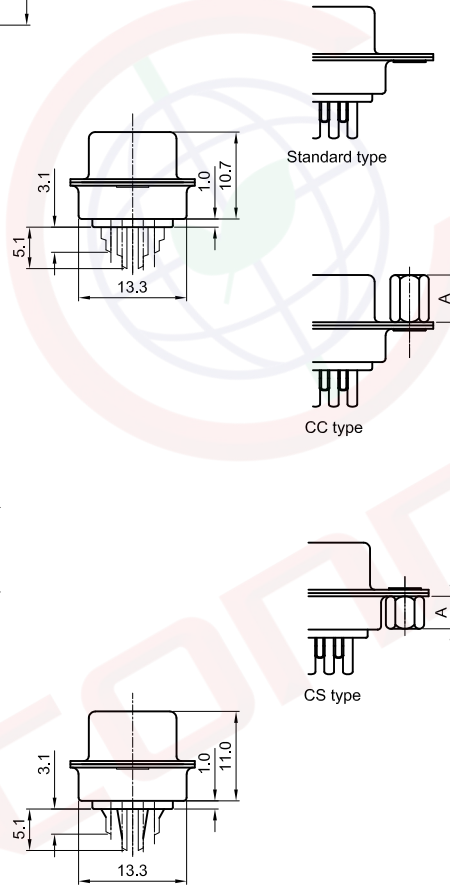

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 12/06/06'	~	LJC 12/06/06'
B	增加锁螺丝类型	YCH 06/30/07'	~	LJC 06/30/07'
C	DRAWING UPDATE	JLZ 07/20/17'	HZW 07/20/17'	LJC 07/20/17'
D	DRAWING UPDATE	JLZ 08/08/18'	~	

Notes:

Specifications:

- Contact Resistance: 20mΩ Max.
- Insulation Resistance: 1000MΩ Min.
- Dielectric Withstanding Voltage: 500V AC(rms) For 1 Minute.
- Current Rating:3A.
- Voltage (MAX):350V.
- Temperature: -40°C~+105°C.

Materials:

- Contact Material: Copper Alloy.
- Shell Material: Steel.
- Insulator Material: Thermoplastic,Black,Blue or White.

Product Number Code:

DS1035- X X X X X X

Screw DIM. A
S: Standard(W/O nut)
1: 3.00
2: 4.00
3: 4.50
4: 5.00
5: 5.50
6: 5.80

Screw type
S: Standard(W/O nut)
1: CC type
2: CS type

Contact plating
8: Full gold flash
S: Selective gold flash

Shell plating
T: Front & Back shell tin
N: Front shell nickel, Back shell tin

Housing color
B: Black
W: White
U: Blue

Connector type
M: Male
F: Female

No.of contacts
78: 78pos.

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X.	±0.60	X.	±5°	UNITS	mm	D-SUB H.D SOLDER TYPE	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1035 SERIES
.XX	±0.25	.XX	±2°	 晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD			
DRAWING TYPE		CUSTOMER					
SCALE		1:1	SHEET 1 OF 1				
DRAWING NO.		C-DS1035-78XXXXXX-D					