




The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

1 2 3 4 5 6 7 8


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 04/27/10'		LJC 04/27/10'
B	DRAWING UPDATE	JLZ 05/10/19'		
C	DRAWING UPDATE	JLZ 11/21/25'		

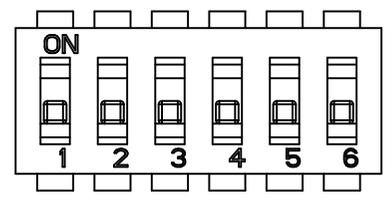

Warning:
During the soldering process,
The switch must be turned off.

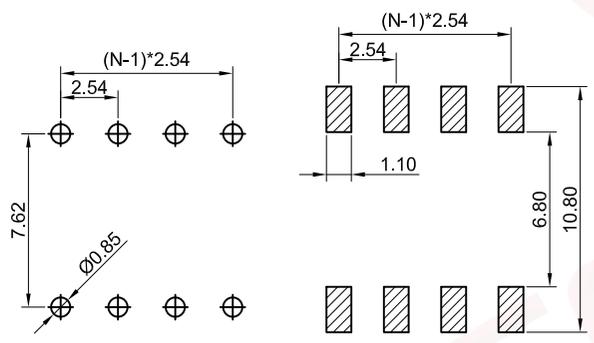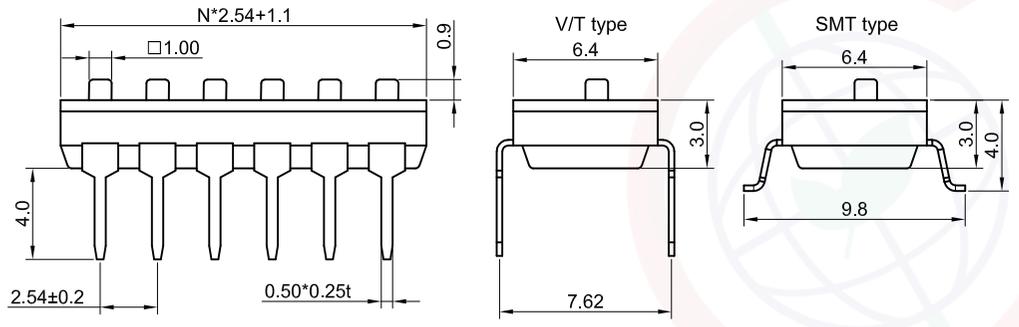

Recommend PCB layout
(Tolerance:±0.05)

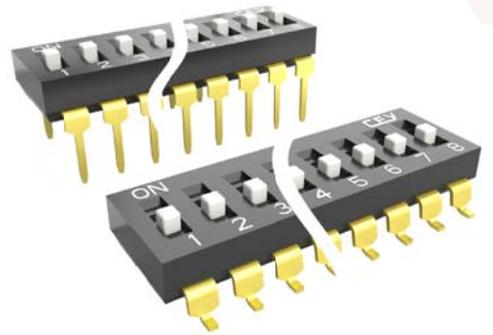

(Series Image-Reference Only)

Notes:

Specifications:

- Contact Resistance: 100mΩ Max.
- Insulation Resistance: 1000MΩ Min.
- Dielectric Withstanding Voltage: 500V AC(rms) For 1 Minute.
- Current Rating:25mA.
- Voltage Rating:24V DC rms.
- Temperature: -25°C~+70°C.
- Operating Life: 2000 cycle min.

Materials:

- Contact Material: Copper Alloy.
- Contact Plating: Gold Plating Over Nickel.
- Insulator Material: High temperature 260°C,UL 94V-0.

Product Number Code:

DS1040-01 - X X X X X

- X Packing type
- B: Tube
- T: Tray
- R: Tape & reel
- X Acuator color
- W: White
- X Housing color
- B: Black
- X Mounting type
- V: V/T type
- S: SMT type
- No. of contacts
- 01 02 03 04 05 06
- 07 08 09 10 11 12

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	SWITCH PITCH 2.54mm SMT&V/T TYPE	
X.	±0.60	X.	±5°	UNITS	mm			
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1040-01 SERIES	
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONNELY CONNELY ELECTRONIC CO. LTD				
DRAWING TYPE		CUSTOMER						
SCALE	1:1	SHEET	1 OF 1					
DRAWING NO.		C-DS1040-01-XXXXX-C						

1 2 3 4 5 6 7 8