

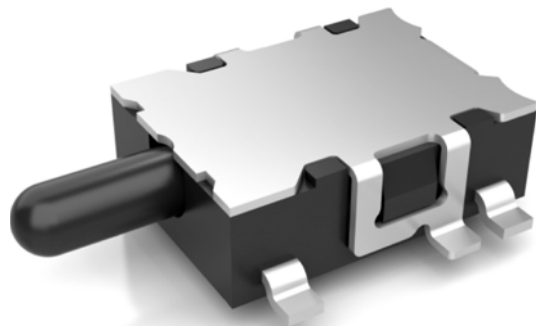


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use is strictly prohibited without prior written consent from CONNELY. All intellectual properties provided herein are for reference purposes only and does not constitute authorization of its use in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.



NOTES:

1. Specifications:
 - . Contact Rating: 50mA at 12V DC
 - . Insulation Resistance:100MΩ min.
 - . Contact Resistance:150mΩ max.
 - . Dielectric Withstanding Voltage: 250V AC(rms) for 1 minute.
 - . Operating Life:50,000 cycles
 - . Travel:2.0±0.2mm(Contact trip:0.3±0.1)
 - . Operation Temperature Range: -25°C to +70°C
 - . Wave Soldering: Recommended Solder Temperature at 500°F(260°C)max. 5 Seconds
 - . Hand Soldering: Use Soldering Iron Of 30 Watts,Controlled at 608°F(320°C)Approximately 2 Seconds.
2. Product number code:
DS1042-18 - X X X X X X X X

TOLERANCE ±5° ±3° ±2°	PROJECTION		TITLE	Detector Switch
	UNITS	mm		SMT Type 5.6mmX4.0mm
	SHEET SIZE	A4	SERIES	DS1042-18 SERIES
 晨翔电子有限公司 CONNPLY CONNPLY ELECTRONIC CO. LTD				
T 1 OF 1 8-XXXX-B				



(Series Image-Reference Only)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	Detector Switch
X. ±0.60		X. ±5°		UNITS	mm		SMT Type 5.6mmX4.0mm
.X ±0.38		.X ±3°		SHEET SIZE	A4	SERIES	DS1042-18 SERIES
.XX ±0.25		.XX ±2°		 晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD			
DRAWING TYPE	CUSTOMER						
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.	C-DS1042-18-XXXXX-B						