

| | |
|------|---|
| Dept | |
| Qty | |
| DC | 1 |
| ED | 1 |
| IE | 1 |
| ISO | 1 |
| PD | 1 |
| R&D | 1 |
| SD | 1 |
| QA | 1 |
| QC | 1 |
| QE | 1 |

| REV. | DESCRIPTION | DRAWN | CHECKED | APPROVED |
|------|-------------|---------------|---------|----------|
| A | NEW RELEASE | YCH 07/17/12' | | |
| | | | | |
| | | | | |




The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or modification is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

NOTES:

- SPECIFICATIONS:
 - CONTACT CURRENT RATING: 1A MAX. PER PIN.
 - CONTACT RESISTANCE: 30 mΩ MAX.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000 MΩ MIN.
 - OPERATING TEMPERATURE: -40°C~+105°C.
- PRODUCT NUMBER CODE:

DS1063 - X X X X X

- Contact plating
0: Selective Gold Flash
- No. of contacts:
3 4 5 6 7 8
- Shell Plating:
N: Nickel
- Color of housing
B: Black
- Connector Type
M: Male

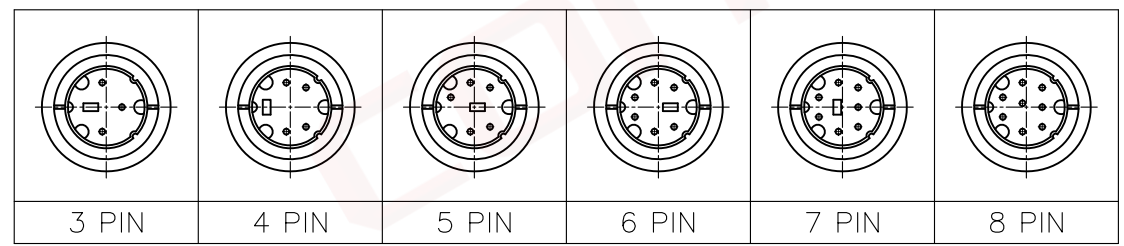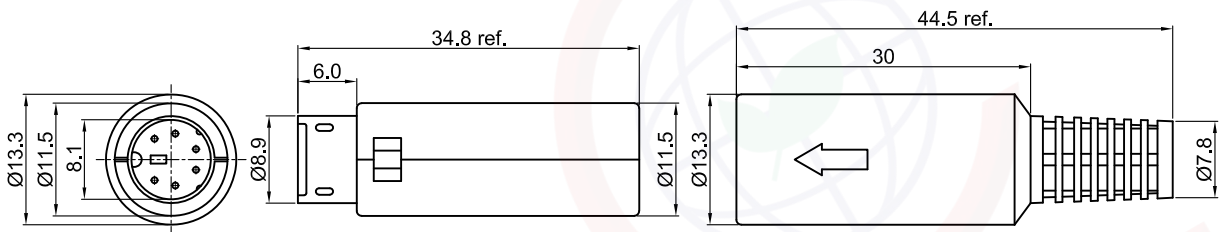

| | | | | | | | | | |
|-------------------|-------|-----------------|-----|---|----|------------|----------------------------|--------|---------------|
| GENERAL TOLERANCE | | ANGLE TOLERANCE | | PROJECTION | | TITLE | MALE MINI DIN WITH SR TYPE | | |
| X. | ±0.60 | X. | ±5° | UNITS | mm | SHEET SIZE | A4 | SERIES | DS1063 SERIES |
| .X | ±0.38 | .X | ±3° | 晨翔电子有限公司 CONNELY CONNELY ELECTRONIC CO. LTD | | | | | |
| .XX | ±0.25 | .XX | ±2° | | | | | | |
| DRAWING TYPE | | CUSTOMER | | SCALE | | | | | |
| SCALE | | 1:1 | | SHEET | | 1 OF 1 | | | |
| DRAWING NO. | | C-DS1063-XXXX-A | | | | | | | |