

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	HP 26/06/05'		LJC 26/06/05'
B	DRAWING UPDATE	JLZ 11/17/17'	HZW 11/17/17'	LJC 11/17/17'
E	DRAWING UPDATE	JLZ 12/14/21'		

NOTES:


- 1. Specifications
 - . Current Rating: 1A
 - . Insulation Resistance: 500MΩ Min
 - . Dielectric Withstanding: 300V AC
 - . Contact Resistance: 30mΩ Max
 - . Operating Temperature: -40°C to +105°C

- ## 2.Materials
- . Contact Material: Copper alloy
 - . Insulator: Thermoplastic(UL94 V-0)





3.Product number code:

DS1065-06 - X X X X X X X

- Packing type
R:Tape on reel
N/A Code:Tube
- Mylar support
S:W/ Mylar
N/A Code:W/O Mylar
- Mounting type
S:SMT type
- Housing color
B:Black
- Contact plating
8: Full gold flash
- Connector type
S:Socket
- No.of contacts
2x2-2x40

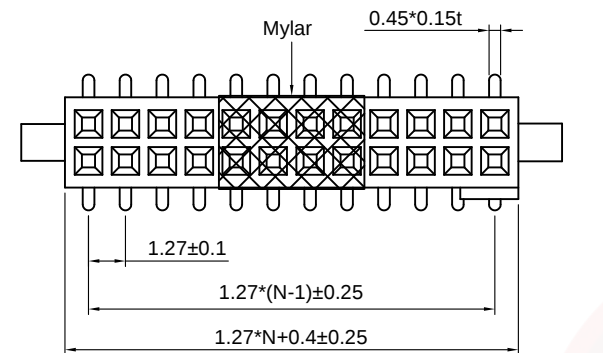

N=No. of contacts/2

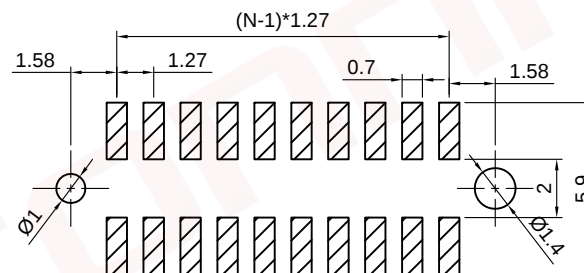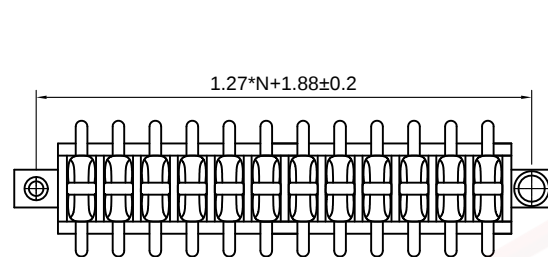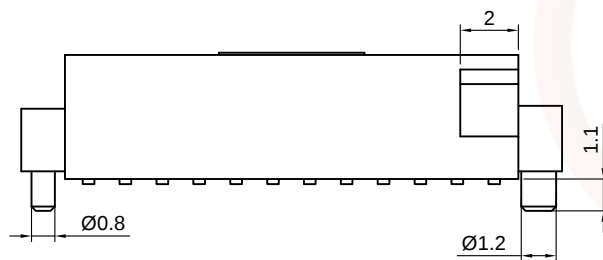

Recommended PCB layout
(Tolerance:±0.05)



(Series Image-Reference Only)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION				TITLE		1.27mm Female Header Double	
X. ±0.60		X. ±5°		UNITS		mm				Row SMT W/ Post Type	
.X ±0.38		.X ±3°		SHEET SIZE		A4		SERIES		DS1065-06 SERIES	
.XX ±0.25		.XX ±2°									
DRAWING TYPE		CUSTOMER									
SCALE		1:1		SHEET		1 OF 1					
DRAWING NO.		C-DS1065-06-XXXXXXX-E									
 晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD											

