
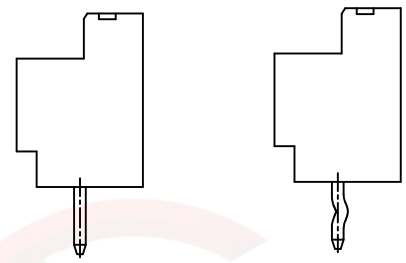


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 06/22/19'		

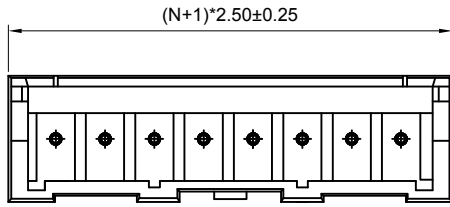

Notes:

Specifications:



- Contact Resistance: 20mΩ Max.
- Insulation Resistance: 1000MΩ Min.
- Dielectric Withstanding Voltage: 500V AC(rms) For 1 Minute.
- Current Rating:3A(22Awg).
- Temperature: -25°C~+85°C.

Materials:

- Contact Material: Copper Alloy.
- Contact Plating: Tin Plating Over Nickel.
- Insulator Material: Nylon.



Product Number Code:

N=No. of contacts

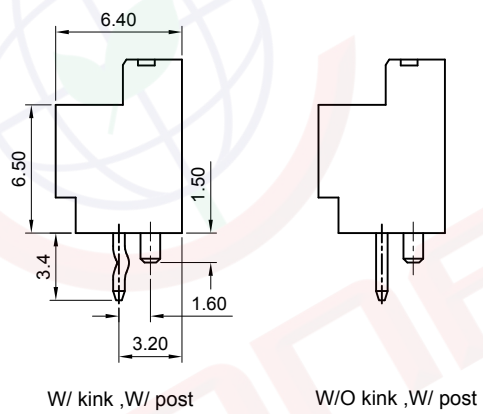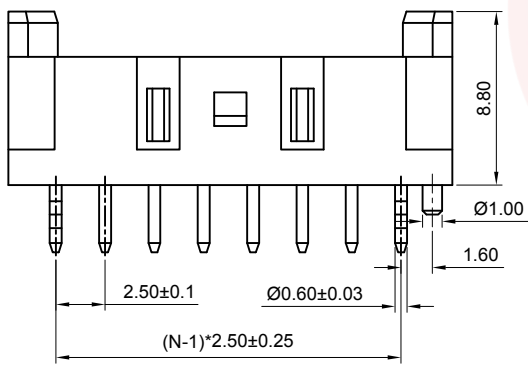

DS1069-16- X X X X X X

- Post support  
S: W/ post  
X:W/O post
- Kink support  
S: W/ kink  
X:W/O kink
- Contact plating  
6: Tin
- Housing color  
B: Black  
V: Ivory .....
- Mounting type  
V: V/T type
- Connector type  
M: Male
- No. of contacts  
02~20

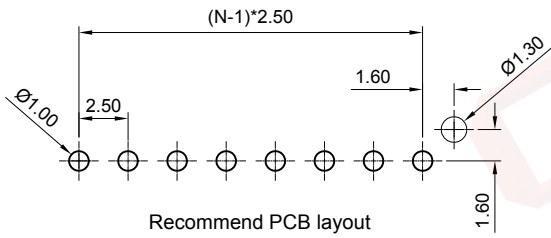

(Series Image-Reference Only)





GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE
X.	±0.60	X.	±5°		2.50mm Wafer V/T Type
.X	±0.38	.X	±3°	mm	
.XX	±0.25	.XX	±2°	SHEET SIZE	A4
DRAWING TYPE		CUSTOMER		SERIES	DS1069-16 SERIES
SCALE		1:1		SHEET 1 OF 4	
DRAWING NO.		C-DS1069-16-XXXXXX-A			

**晨翔电子有限公司**  
 CONNELY CONNELY ELECTRONIC CO. LTD


Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 06/22/19'		

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

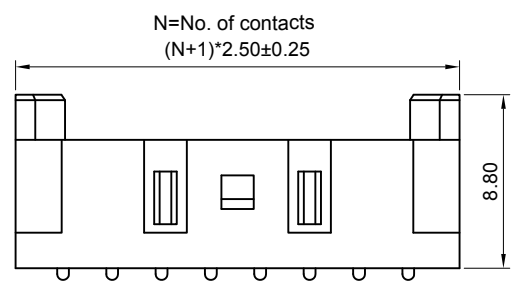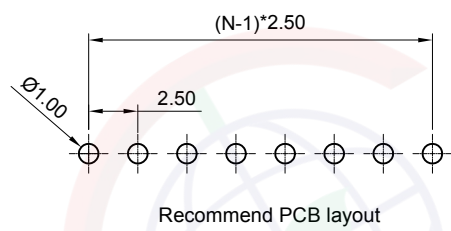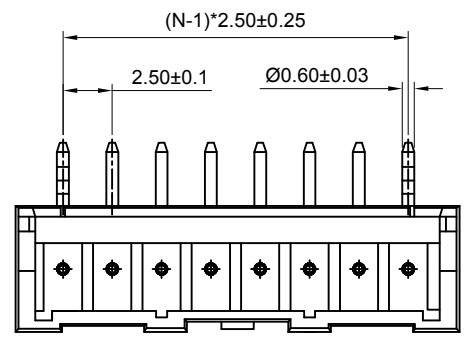

W/ kink



W/O kink

Notes:

Specifications:

- Contact Resistance: 20mΩ Max.
- Insulation Resistance: 1000MΩ Min.
- Dielectric Withstanding Voltage: 500V AC(rms) For 1 Minute.
- Current Rating: 3A(22Awg).
- Temperature: -25°C~+85°C.


Materials:

- Contact Material: Copper Alloy.
- Contact Plating: Tin Plating Over Nickel.
- Insulator Material: Nylon.

Product Number Code:


DS1069-16- X X X X X 0

- Kink support  
S: W/ kink  
X: W/O kink
- Contact plating  
6: Tin
- Housing color  
B: Black  
V: Ivory .....
- Mounting type  
R: R/A type
- Connector type  
M: Male
- No. of contacts  
02~20

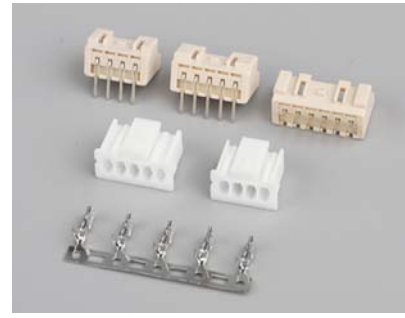

(Series Image-Reference Only)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X.	±0.60	X.	±5°	UNITS	mm	2.50mm Wafer R/A Type	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1069-16 SERIES
.XX	±0.25	.XX	±2°				
DRAWING TYPE		CUSTOMER					
SCALE		1:1	SHEET	2 OF 4			
DRAWING NO.		C-DS1069-16-XXXXXX-A					







**晨翔电子有限公司**  
CONNFLY CONNELY ELECTRONIC CO. LTD

Dept	Qty
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this document, in any form or by any means, without the prior written permission of CONNELY is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 06/22/19'		

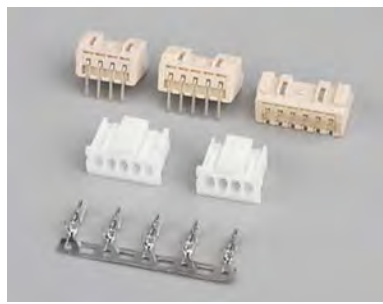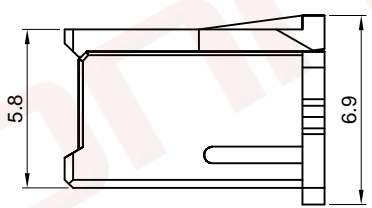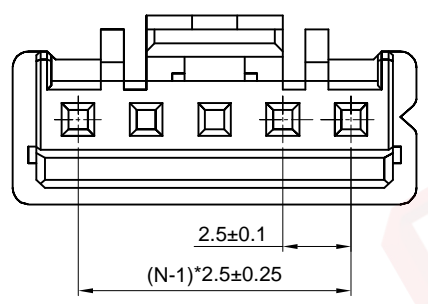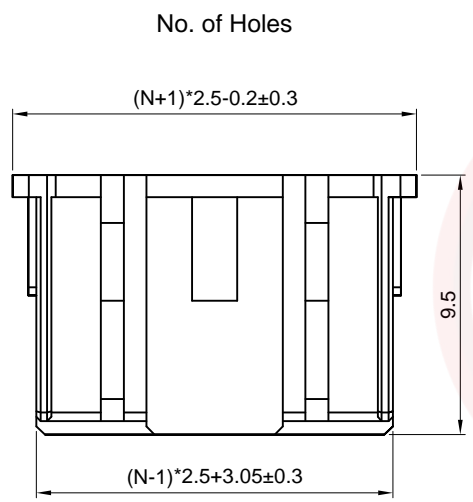

(Series Image-Reference Only)

Notes:

Specifications:

1. Contact Resistance: 20mΩ Max.
2. Insulation Resistance: 1000MΩ Min.
3. Dielectric Withstanding Voltage: 600V AC(rms) For 1 Minute.
4. Current Rating:2A.
5. Voltage Rating:250V AC rms.
6. Temperature: -25°C~+85°C.

Material:

1. Insulator Material: PA66,White.

Product Number Code:

I - DS1069-16 - S C W 0 X

No.of Holes  
02~20


Housing color  
W: White

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X.	±0.60	X.	±5°	UNITS	mm	2.5mm Crimp Style Connectors	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1069-16 SERIES
.XX	±0.25	.XX	±2°	<b>晨翔电子有限公司</b> <b>CONNFLY CONNELY ELECTRONIC CO. LTD</b>			
DRAWING TYPE		CUSTOMER					
SCALE	1:1	SHEET	3 OF 4				
DRAWING NO.		C-DS1069-16-XXXXXX-A					



Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 06/22/19'		

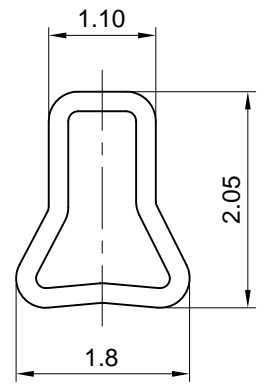

X VIEW

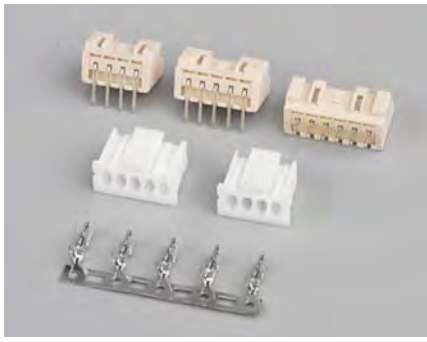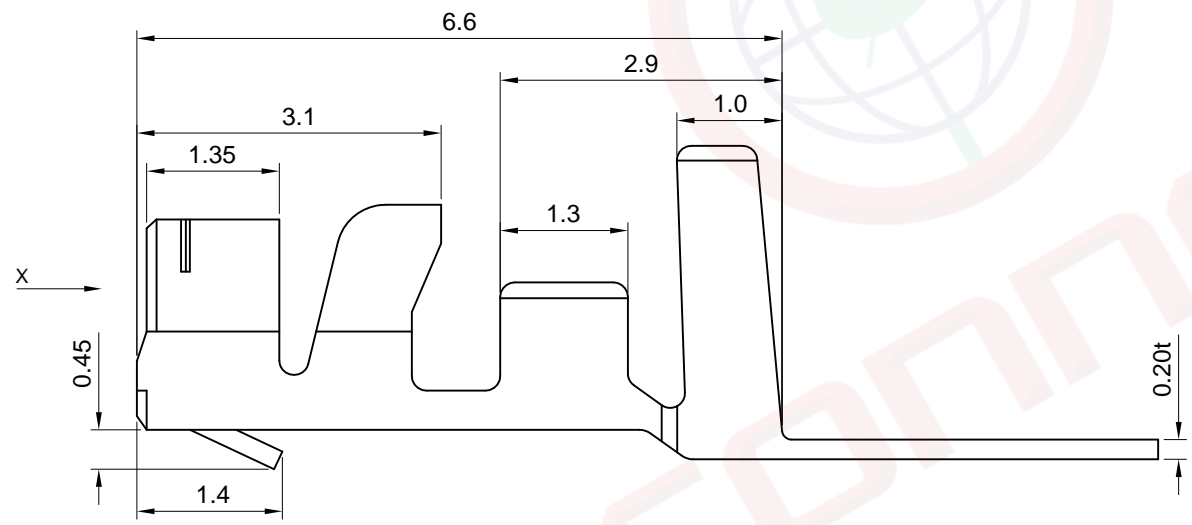

(Series Image-Reference Only)

NOTES:  
 . Applicable Wires:AWG#30~24  
 . Material:Phos. Bronze  
 . Finish:Tin plated  
 . Thickness:0.2mm  
 Product Number Code:

T - DS1069-16 - S C 6 0 0

Contact plating  
6: Tin

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X.	±0.60	X.	±5°	UNITS	mm	2.5mm Crimp Style Connectors	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1069-16 SERIES
.XX	±0.25	.XX	±2°	<b>晨翔电子有限公司</b> <b>CONNFLY CONNELY ELECTRONIC CO. LTD</b>			
DRAWING TYPE		CUSTOMER					
SCALE	1:1	SHEET	4 OF 4				
DRAWING NO.		C-DS1069-16-XXXXXX-A					