
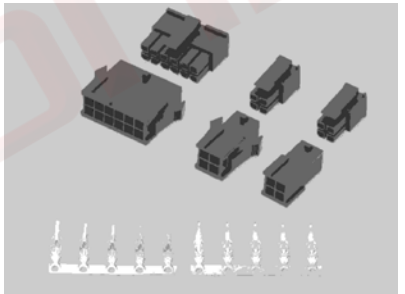
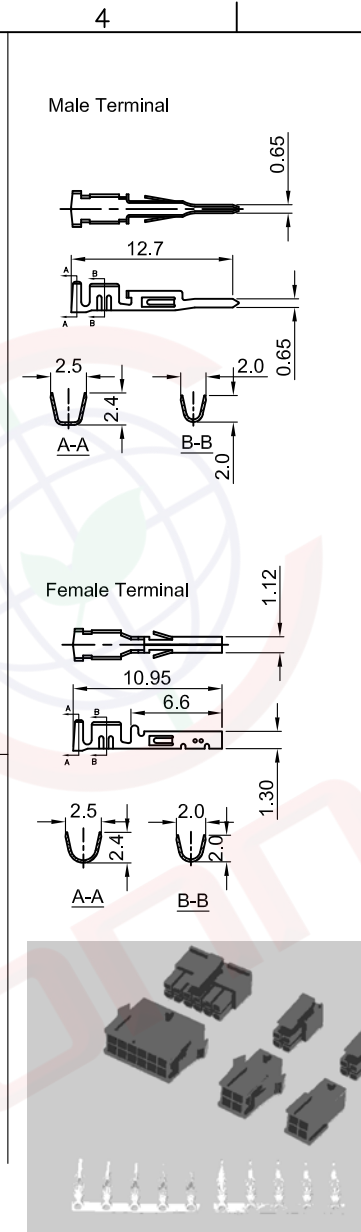
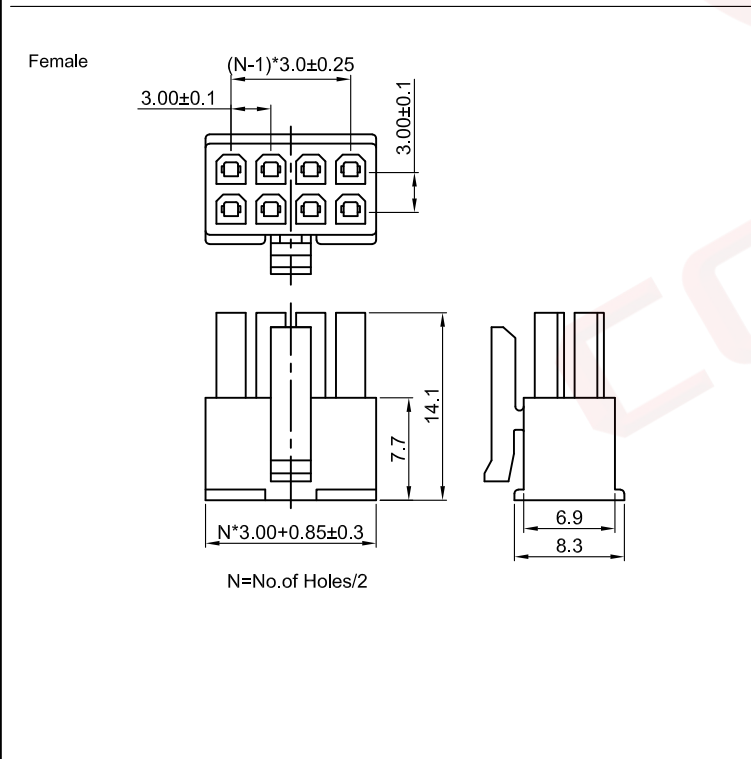


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

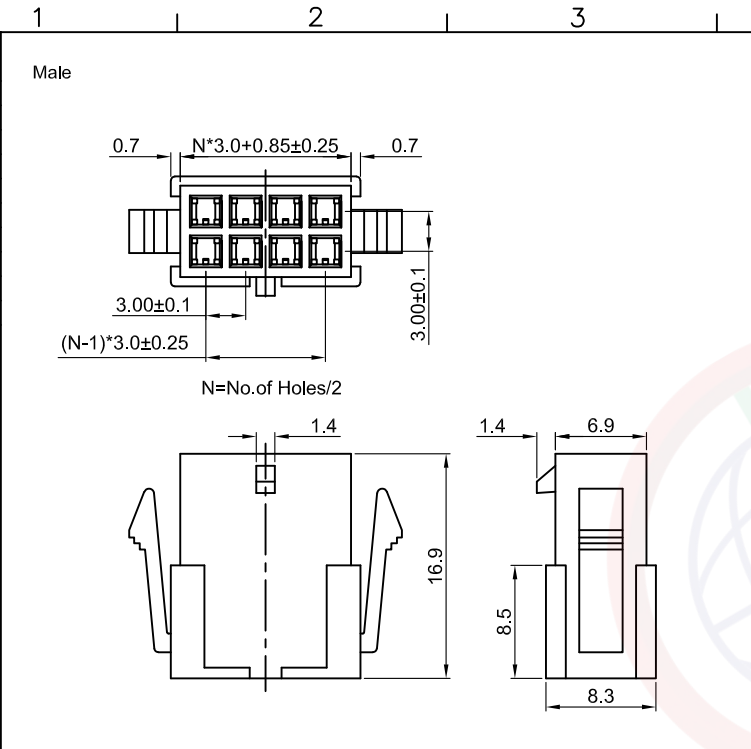

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 07/07/06'		
B	DRAWING UPDATE	JLZ 05/21/18'		
C	DRAWING UPDATE	JLZ 09/13/23'		

- NOTES:
- Main specifications
 - Housing material: Nylon 66
 - Wire range: AWG#28-#20
 - Rated voltage: 250V
 - Rated current: 3A(22AWG)
 - Contact resistance: 30mΩ
 - Insulation resistance: 1000MΩ
 - Withstanding voltage: 500V, AC 1 minute
 - Temperature range: -25 ~ +85°C
 - Product number code:

Housing:

I - DS1073-03 - X X X 0 X

- No. of Holes: 02x1-02x12
- Housing Color: B: Black
- Mounting type: C: Crimp type
- Housing type: P: Male, S: Female

Terminal:

T - DS1073-03 - X X 6 0 0

- Plating type: 6: Tin
- Mounting type: C: Crimp type
- Terminal type: P: Male, S: Female

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

PROJECTION	TITLE
	3.0mm Crimp Type Connector
UNITS	mm
SHEET SIZE	A4
SERIES	DS1073-03 SERIES

DRAWING TYPE	CUSTOMER
SCALE	1:1 SHEET 1 OF 1
DRAWING NO.	C-DS1073-03-XXXXX-C

晨翔电子有限公司
CONNELY CONNELY ELECTRONIC CO. LTD