


Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 09/04/17'		
B	DRAWING UPDATE	JLZ 12/20/24'		
C	DRAWING UPDATE	JLZ 05/13/26'		

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or modification is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

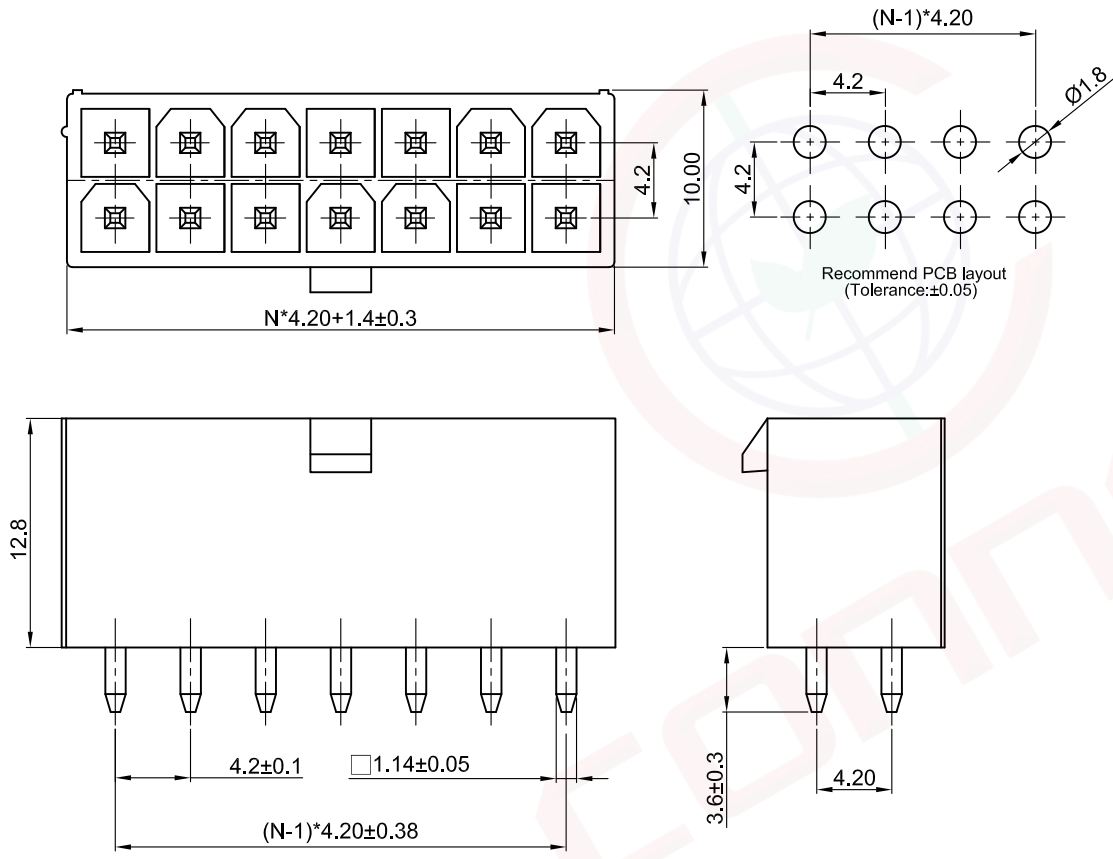

NOTES:  
 Specifications:  
 1. Contact resistance: 30mΩ Max.  
 2. Insulation resistance: 1000MΩ Min.  
 3. Dielectric withstanding voltage: 1000V AC(Rms) for 1 minute.  
 4. Current rating:9A.  
 5. Voltage rating:600V AC/DC.  
 6. Temperature: -25°C~+85°C.  
 Materials:  
 1. Contact material: Copper alloy.  
 2. Contact plating: Tin plating over nickel.  
 3. Insulator material: Nylon,Transparent .  
 Product number code:

DS1073-06 - X X X X X

- Contact plating
- 6: Tin
- 8: Gold flash
- Housing color
- T: Transparent
- Mounting type
- V: V/T type
- Connector type
- M: Male
- No. of contacts
- 2x2- 2x12

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	4.2mm Connector DIP type
X.	±0.60	X.	±5°	UNITS	mm	SHEET SIZE	A4
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1073-06 SERIES
.XX	±0.25	.XX	±2°	晨翔电子有限公司 <b>CONNELY CONNELY ELECTRONIC CO. LTD</b>			
DRAWING TYPE		CUSTOMER					
SCALE		1:1 SHEET 2 OF 2					
DRAWING NO.		C-DS1073-06-XXXXX-C					