

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

1 2 3 4 5 6 7 8

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 07/28/05'		LJC 07/28/05'
B	DRAWING UPDATE	JLZ 04/12/17'	HZW 04/12/17'	LJC 04/12/17'
C	DRAWING UPDATE	JLZ 04/29/20'		

Notes:

Specifications:

- Contact Resistance: 30mΩ Max.
- Insulation Resistance: 1000MΩ Min.
- Dielectric Withstanding Voltage: 500V AC(rms) For 1 Minute.
- Current Rating: 1.5A Max
- Voltage Rating: 30V Max
- Temperature: -30°C~+80°C.



Materials:

- Contact Material: Copper Alloy.
- Shell Material: Steel.
- Insulator Material: Thermoplastic, White.

Product Number Code:

DS1107 - X X X

- Contact plating
- 0: Selective gold flash
- C: Selective gold 3u"
- 3: Selective gold 30u"
- Shell plating
- N: Nickel
- 6: Tin
- Color of housing
- W: White

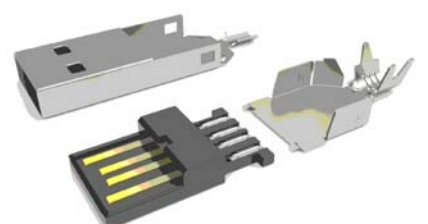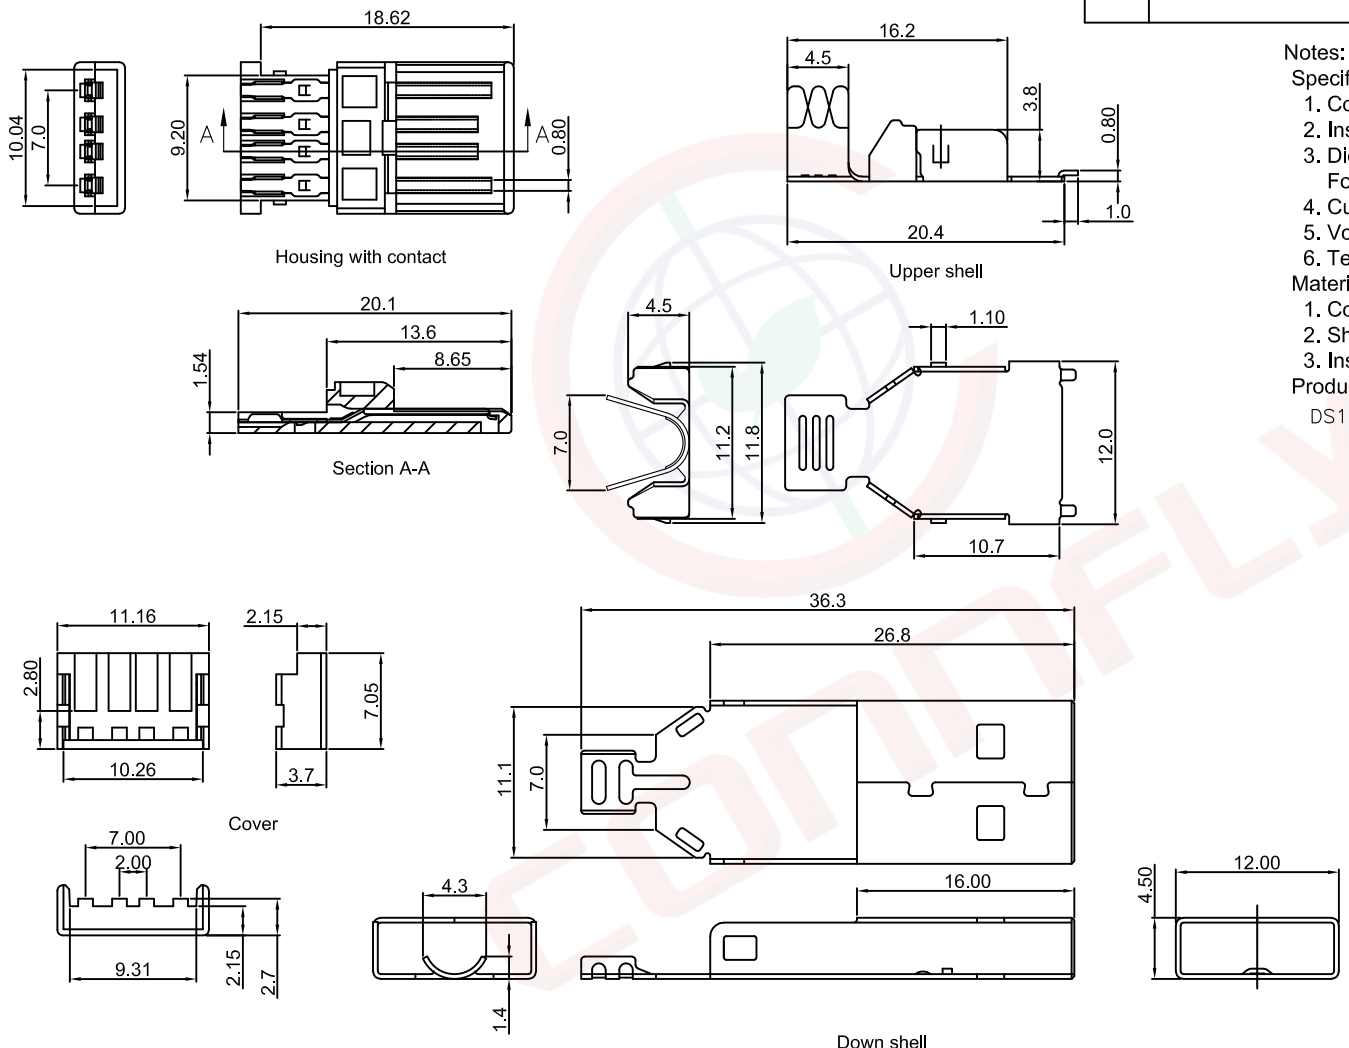

(Series Image-Reference Only)

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER
SCALE	1:1 SHEET 1 OF 1
DRAWING NO.	C-DS1107-XXX-C

PROJECTION	TITLE
	USB Plug A Type Solder Type
UNITS	mm
SHEET SIZE	A4
SERIES	DS1107 SERIES

晨翔电子有限公司
CONNFLY CONNELY ELECTRONIC CO. LTD

1 2 3 4 5 6 7 8