








REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 01/03/21'		
B	DRAWING UPDATE	JLZ 05/03/23'		

NOTE:

1. Material specification:
 - 1-1. Housing: High temperature resistant plastic, UL94 V-0.
 - 1-2. Contacts: Copper alloy
 - 1-3. Shell: Stainless steel
2. Electrical performance:
 - 2-1. Current rating: 5.0A
Voltage rating: 5.0V
 - 2-2. LLCr:
Vbus & Gnd pins and other pins: 40mΩ/ Pin Max.
Shield: 50mΩ/ Max.
LLCr Max. Change of all pins: 10mΩ.
 - 2-3. Insulation resistance: 100MΩ Min
 - 2-4. Dielectric withstand voltage, AC 100V for 1 minute.
3. Environmental performance:
 - 3-1. Operating temperature: -25°C~+85°C.
4. Ir reflow:
 - 4-1. The peak temperature on the board shall
Be maintained for 10 seconds at 260°C.
5. Product number code:

DS1144-62 - X X X X X X X

- Packing Type
R: Tape On Reel
- Shell Plating
N: Full Nicke
- Housing color
B: Black
- Contact Plating
8: Gold flash
- Mounting type
S: SMT type
- Connector type
F: Female
- No. of contacts
24: 24pin

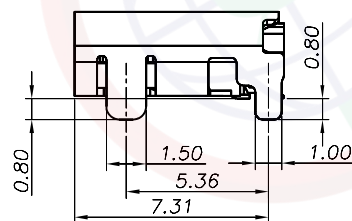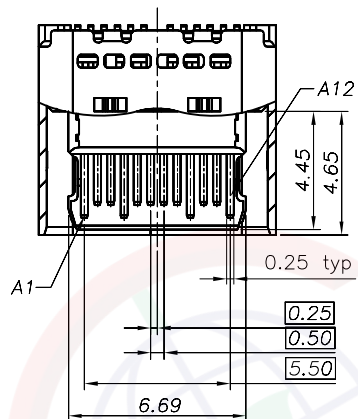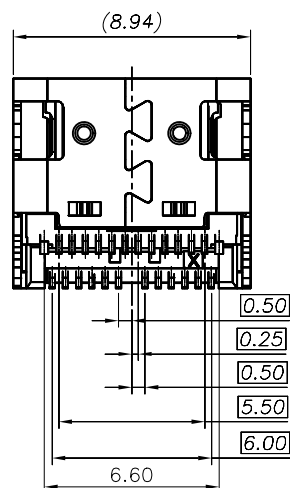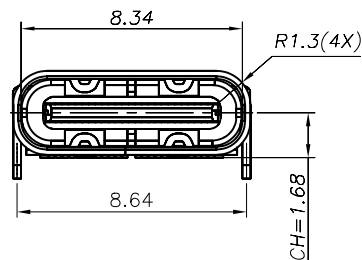


3D View

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	USB C Type 24P Female Horizontal SMT Type L=7.9mm Centre-H=1.68mm	
X.	±0.60	X.	±5°	UNITS	mm			
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1144-62 SERIES	
.XX	±0.25	.XX	±2°	 晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD				
DRAWING TYPE		CUSTOMER						
SCALE	1:1	SHEET	1 OF 2					
DRAWING NO.	C-DS1144-62-XXXXXX-B							

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or modification is strictly prohibited without prior written consent from CONNELY. All intellectual properties provided herein are for reference purposes only and does not constitute authorization of its use in any form or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

Dept
Qty
DC 1
ED 1
IE 1
ISO 1
PD 1
R&D 1
SD 1
QA 1
QC 1
QE 1

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of this document in any form or by any means, electronic or mechanical, including photocopying, recording, or by any information storage and retrieval system, without prior written permission from CONNELY is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

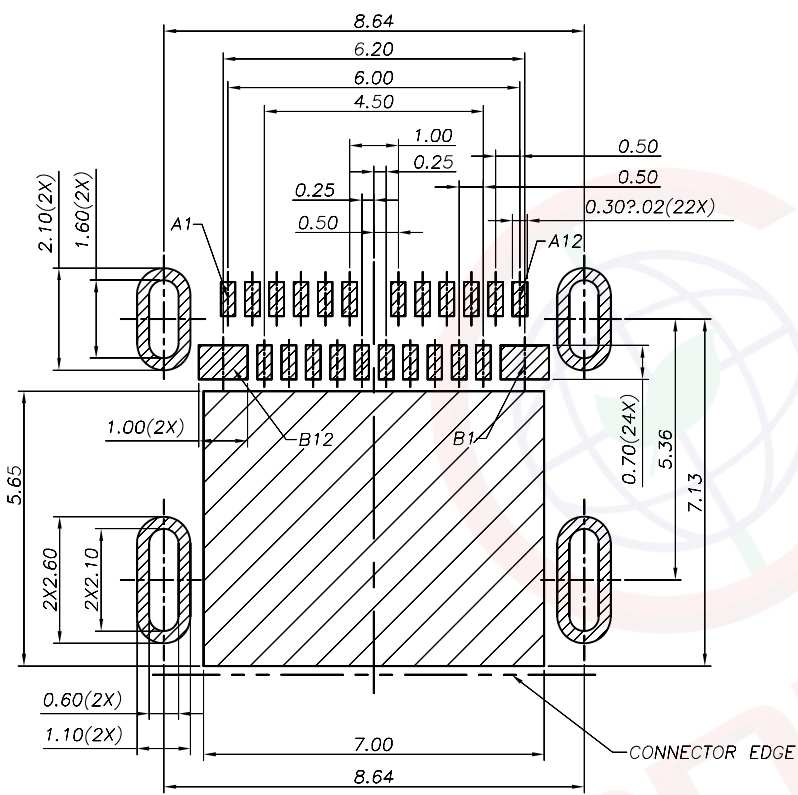

RECOMMENDED PCB LAYOUT(TOP VIEW)
THICKNESS 0.60MM;DEFAULT TOLERANCE:±0.05

USB TYPE-C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A2	TXp1	B11	RXp1
A3	TXn1	B10	RXn1
A4	Vbus	B9	Vbus
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	Vbus	B4	Vbus
A10	RXn2	B3	TXn2
A11	RXp2	B2	TXp2
A12	GND	B1	GND

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE	USB C Type 24P Female Horizontal SMT Type L=7.9mm Centre-H=1.68mm	
X.	±0.60	X.	±5°	UNITS	mm		
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1144-62 SERIES
.XX	±0.25	.XX	±2°				
DRAWING TYPE		CUSTOMER		 晨翔电子有限公司 CONNELY CONNELY ELECTRONIC CO. LTD			
SCALE		1:1					
DRAWING NO.		C-DS1144-62-XXXXXX-B					
		SHEET		2 OF 2			

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 01/03/21'		
B	DRAWING UPDATE	JLZ 05/03/23'		

- NOTE:
- Material specification:
 - 1-1. Housing:High temperature resistant plastic,UL94 V-0.
 - 1-2. Contacts:Copper alloy
 - 1-3. Shell: Stainless steel
 - Electrical performance:
 - 2-1. Current rating:5.0A
Voltage rating:5.0V
 - 2-2. LLCR:
Vbus & Gnd pins and other pins: 40mΩ/Pin Max.
Shield: 50mΩ/Max.
LLCR Max. Change of all pins: 10mΩ.
 - 2-3.Insulation resistance: 100MΩ Min
 - 2-4.Dielectric withstand voltage,AC 100V for 1 minute.
 - Environmental performance:
 - 3-1. Operating temperature: -25°C~+85°C.
 - Ir reflow:
 - 4-1. The peak temperature on the board shall
Be maintained for 10 seconds at 260°C.
 - Product number code:
DS1144-62 - X X X X X X X
- Packing Type
R: Tape On Reel
Shell Plating
N: Full Nicke
Housing color
B: Black
Contact Plating
8: Gold flash
Mounting type
S: SMT type
Connector type
F: Female
No. of contacts
24: 24pin