


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information for any purpose, in any form, without the prior written permission of CONNELY is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

Dept	Qty
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

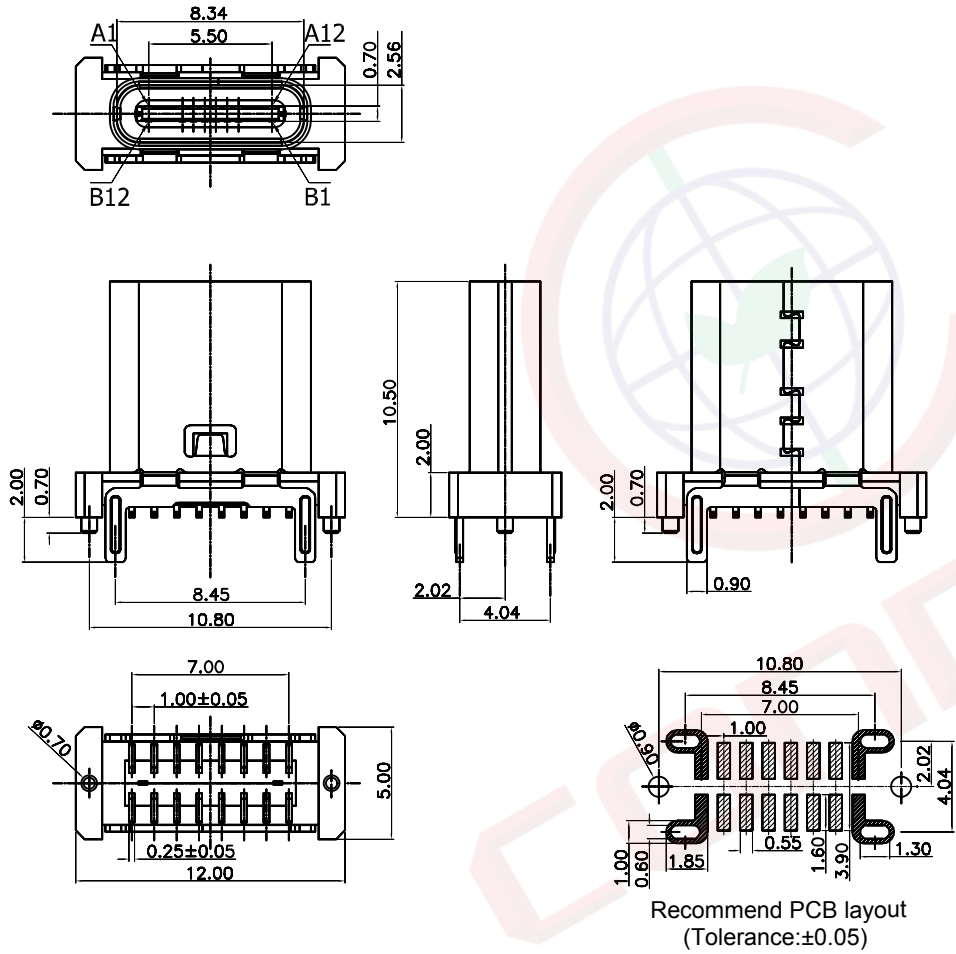

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1144-70-XXXXXX-A		

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 10/20/22'		

NOTE:

- Material specification:
 - 1-1. Housing:High temperature resistant plastic,UL94 V-0.
 - 1-2. Contacts:Copper alloy
 - 1-3. Shell: Stainless steel
- Electrical performance:
 - 2-1. Current rating:5A Max.
Voltage rating:20V Max.
 - 2-2. LLCR:
Vbus & Gnd pins and other pins: 40mΩ/Pin Max.
Shield: 50mΩ/Max.
LLCR Max. Change of all pins: 10mΩ.
 - 2-3. Insulation resistance: 100MΩ Min
 - 2-4. Dielectric withstand voltage,AC 100V for 1 minute.
- Environmental performance:
 - 3-1. Operating temperature: -40°C~+85°C.
- Ir reflow:
 - 4-1. The peak temperature on the board shall
Be maintained for 10 seconds at 260°C.
- Product number code:
DS1144-70 - X X X X X X 0

Packing Type
R: Tape On Reel

Shell Plating
N: Full Nickel

Housing color
B: Black

Contact Plating
0: Selective gold flash

Mounting type
S: SMT type

Connector type
F: Female

No. of contacts
16: 16pin

PROJECTION	TITLE	USB Type-C 16P Female Upright SMT Type H=10.5mm
UNITS	mm	
SHEET SIZE	A4	SERIES DS1144-70 SERIES
 晨翔电子有限公司 CONNELY CONNELY ELECTRONIC CO. LTD		