


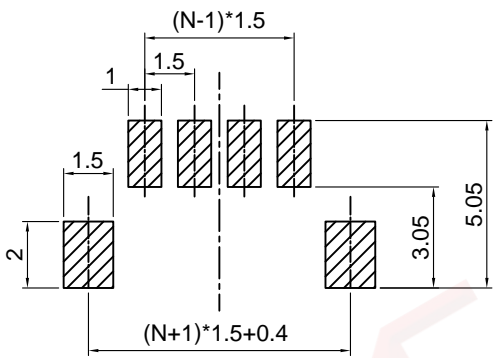


Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.




N=No. of contacts

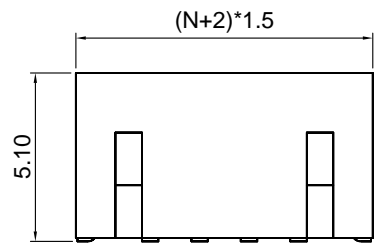

Recommend PCB layout(Tolerance:±0.05)



W/ Pick up

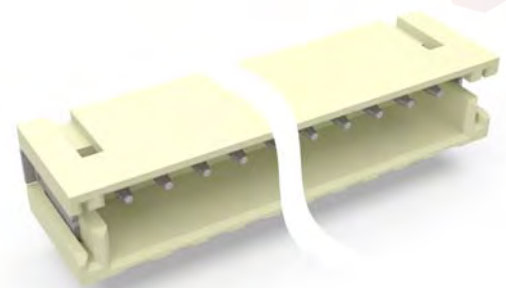

(Series Image-Reference Only)

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 08/04/18'		

Notes:

- Electrical Characteristics:
 - Contact Resistance: 20mΩ Max.
 - Dielectric Withstanding Voltage: 500V AC(rms) For 1 Minute.
 - Insulation Resistance: 500MΩ Min.
 - Current Rating:1.0A.
 - Voltage Rating:50V AC rms.
- Environment Characteristics:
 - Temperature: -25°C~+85°C.
- Materials:
 - Contact Material: Copper Alloy.
 - Contact Plating: Tin Plating Over Nickel.
 - Insulator Materials: LCP,UL94-V0,Natural(Ivory).
- Product Number Code:

DS1147-09 - X X X X X X X X

- Connector type
A: Upright type
- Packing type
B: Tube
R: Tape on reel
- Pick up support
S: W/ Pick up
X: W/O Pick up
- Housing color
V: Ivory
- Contact plating
6: Full tin
- Mounting type
S: SMT type
- Connector type
M: Male
- No. of contacts
02~15

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X.	±0.60	X.	±5°	UNITS	mm	1.50mm ZH Wafer Upright SMT Type	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1147-09 SERIES
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONNFLY ELECTRONIC CO. LTD			
DRAWING TYPE		CUSTOMER					
SCALE		1:1	SHEET 1 OF 1				
DRAWING NO.		C-DS1147-09-XXXXX0XX-A					