


Dept	Qty
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QF	1

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights are reserved for CONNELY Electronic Co., Ltd. All rights reserved. CONNELY Electronic Co., Ltd. does not constitute authorization of its use or modification in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 04/12/22'		

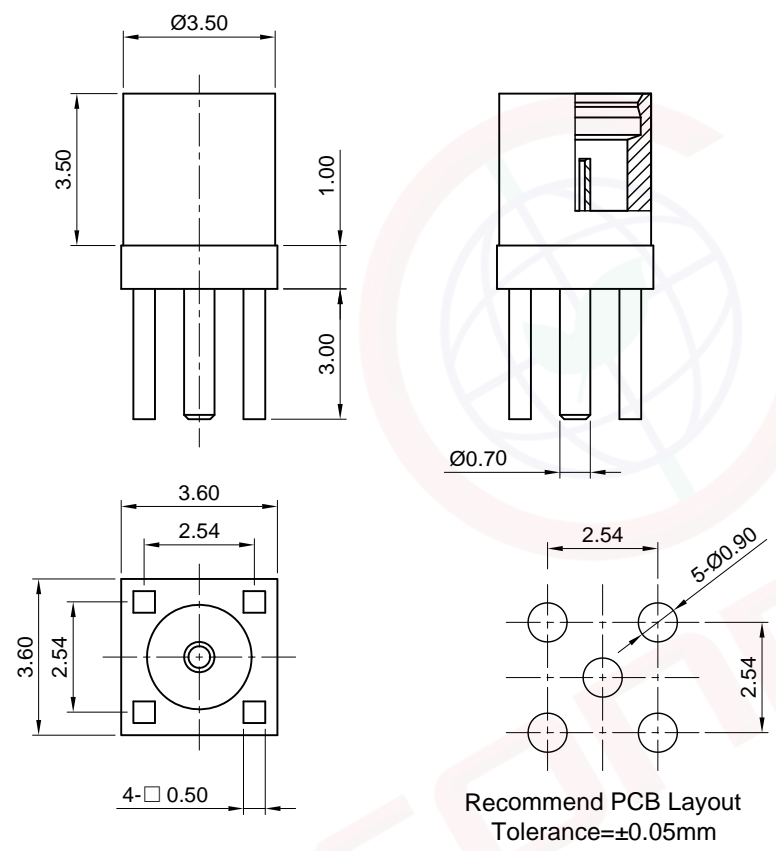

Recommend PCB Layout
Tolerance= $\pm 0.05\text{mm}$



(Series Image-Reference Only)

- Notes:
- Materials:
 - Contact: Copper Alloy, Full Gold Flash Plated.
 - Shell: Copper Alloy, Full Gold Flash Plated.
 - Insulator: PTFE, White.
 - Specifications:
 - Contact Resistance: 10m Ω max.
 - Insulation Resistance: 100M Ω min.
 - Dielectric Withstanding Voltage: 500V min.
 - Temperature Range: -40~+125°C.
 - Impedance: 50 Ω .
 - Operating Cycles: 300 Cycles min.
 - Product Number Code:

DS1158-07 - X X X X X X X

 - X: Packing type T: Tray
 - X: Shell plating 8: Full gold flash C: 3u" gold
 - X: Housing color W: White
 - X: Contact plating 8: Full gold flash C: 3u" gold
 - X: Mounting Type V: V/T type
 - X: Connector type S: Socket
 - X: No.of contacts 01

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION		TITLE	MMCX Connector Socket Vertical Through Type L=7.5mm
X. ± 0.60	X. $\pm 5^\circ$	UNITS	mm	SHEET SIZE	A4
.X ± 0.38	.X $\pm 3^\circ$	SHEET SIZE	A4	SERIES	DS1158-07 SERIES
.XX ± 0.25	.XX $\pm 2^\circ$	晨翔电子有限公司 CONNELY ELECTRONIC CO., LTD			
DRAWING TYPE	CUSTOMER				
SCALE	1:1				
DRAWING NO.	C-DS1158-07-XXXXXX-A				