



The information provided herein is from CONNLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights of CONNLY Electronic Co., Ltd. are reserved. All rights are reserved. CONNLY Electronic Co., Ltd. does not constitute authorization of its use in any format or manner. CONNLY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

1                      2                      3                      4                      5                      6                      7                      8

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 06/02/23'		

A Dept Qty  
 DC 1  
 ED 1  
 IE 1  
 ISO 1  
 PD 1  
 R&D 1  
 SD 1  
 QA 1  
 QC 1  
 QF 1  
 B  
 C  
 D  
 F  
 F  
 G  
 H

2M1F: 2Male+1Female

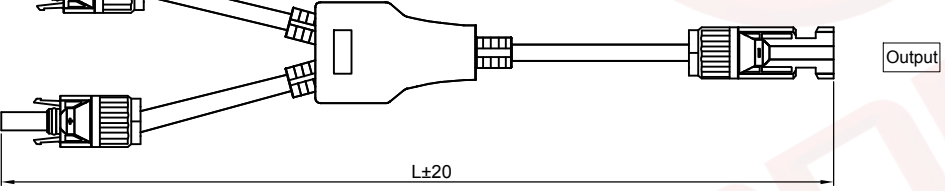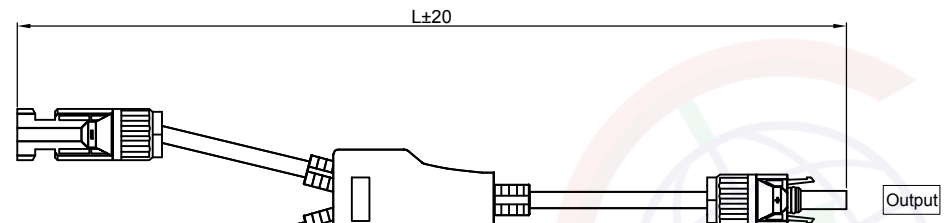

2F1M: 2Female+1Male



(Series Image-Reference Only)

Notes:

Specifications:

1. Contact Resistance: 0.5Ω Max.
2. Current Rating:30A.
3. Voltage Rating:1000V AC rms.
4. Temperature: -40°C~+90°C.

Materials:

1. Insulating material:Thermoplastic Black.
2. Contact material: Red Copper,Tin plated.

Product Number Code:

DS1162-16 - X X X X X

- Wire length(Dim L)  
0300: 300mm  
.....
- Cable color  
B: Black  
R: Red
- Contact plating  
6: Tin
- Housing color  
B: Black
- No. of contacts  
2F1M: 2Female+1Male  
2M1F: 2Male+1Female  
1T2: 2F1M+2M1F

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°


PROJECTION	TITLE
	PV Cable Assemblies Y Type Extension Cable
UNITS	mm
SHEET SIZE	A4
SERIES	DS1162-16 SERIES

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 3
DRAWING NO.	C-DS1162-16-XXXXX-A		

**晨翔电子有限公司**  
**CONNLY CONNLY ELECTRONIC CO. LTD**

1                      2                      3                      4                      5                      6                      7                      8

The information provided herein is from CONNPLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights of CONNPLY Electronic Co., Ltd. are reserved. All rights are reserved. CONNPLY Electronic Co., Ltd. does not constitute authorization of its use in any format or manner. CONNPLY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

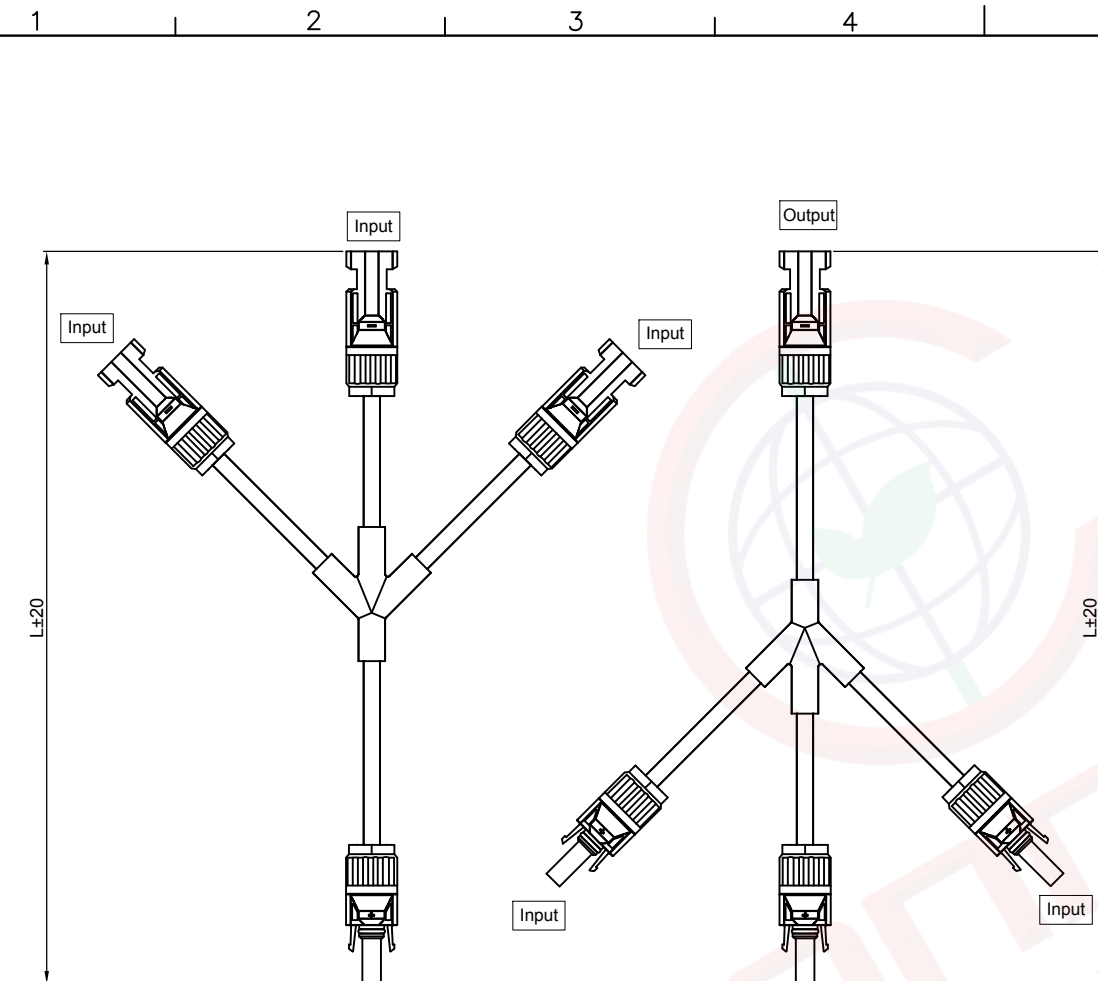

3M1F: 3Male+1Female

3F1M: 3Female+1Male



(Series Image-Reference Only)

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 06/02/23'		

Notes:

Specifications:

- Contact Resistance: 0.5Ω Max.
- Current Rating:30A.
- Voltage Rating:1000V AC rms.
- Temperature: -40°C~+90°C.

Materials:


- Insulating material:Thermoplastic Black.
- Contact material: Red Copper,Tin plated.

Product Number Code:

DS1162-16 - X X X X X

- Wire length(Dim L)  
0350: 350mm  
.....
- Cable color  
B: Black  
R: Red
- Contact plating  
6: Tin
- Housing color  
B: Black
- No. of contacts  
3F1M: 3Female+1Male  
3M1F: 3Male+1Female  
1T3: 3F1M+3M1F

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	PV Cable Assemblies 1To 3 Type Extension Cable		
X.	±0.60	X.	±5°	UNITS	mm	SERIES	DS1162-16 SERIES		
.X	±0.38	.X	±3°	SHEET SIZE	A4				
.XX	±0.25	.XX	±2°						
DRAWING TYPE		CUSTOMER							
SCALE		1:1	SHEET		2 OF 3				
DRAWING NO.		C-DS1162-16-XXXXX-A							




The information provided herein is from CONFLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights of CONFLY Electronic Co., Ltd. are reserved. All intellectual properties provided herein are for reference purposes only and does not constitute authorization of its use in any format or manner. CONFLY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

1                      2                      3                      4                      5                      6                      7                      8

Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 06/02/23'		

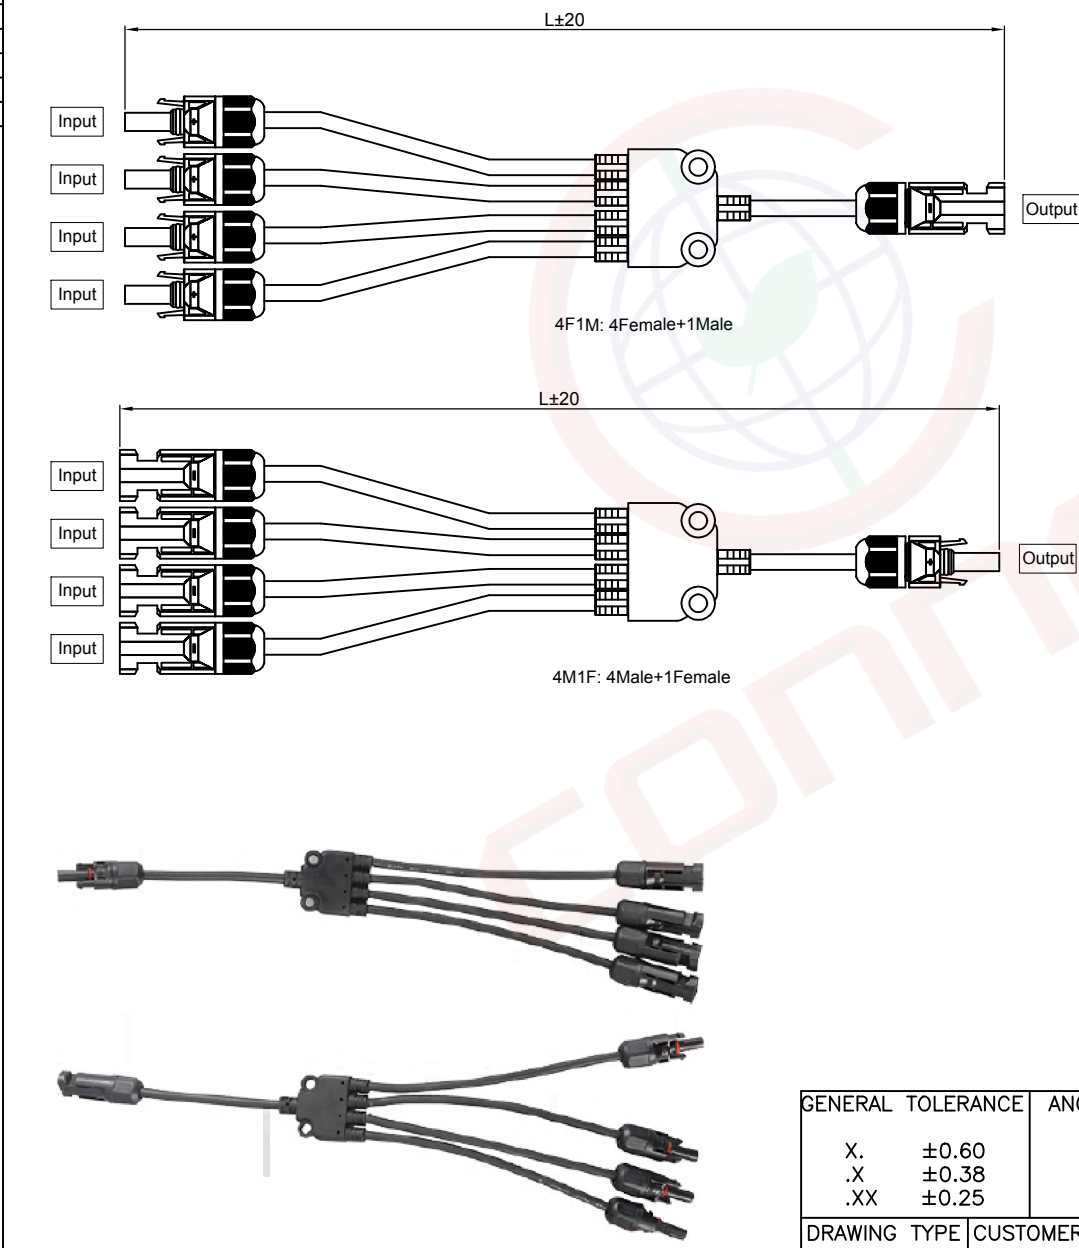

Notes:

Specifications:

- Contact Resistance: 0.5Ω Max.
- Current Rating:30A.
- Voltage Rating:1000V AC rms.
- Temperature: -40°C~+90°C.

Materials:

- Insulating material:Thermoplastic Black.
- Contact material: Red Copper,Tin plated.

Product Number Code:

DS1162-16 - X X X X X

- Wire length(Dim L)  
0450: 450mm  
.....
- Cable color  
B: Black  
R: Red
- Contact plating  
6: Tin
- Housing color  
B: Black
- No. of contacts  
4F1M: 4Female+1Male  
4M1F: 4Male+1Female  
1T4: 4F1M+4M1F

(Series Image-Reference Only)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	PV Cable Assemblies 1To 4 Type Extension Cable					
X.	±0.60	X.	±5°	UNITS	mm	SERIES	DS1162-16 SERIES					
.X	±0.38	.X	±3°	SHEET SIZE	A4							
.XX	±0.25	.XX	±2°									
DRAWING TYPE		CUSTOMER			<b>晨翔电子有限公司</b> <b>CONFLY CONNFLY ELECTRONIC CO. LTD</b>							
SCALE		1:1	SHEET							3 OF 3		
DRAWING NO.		C-DS1162-16-XXXXX-A										

1                      2                      3                      4                      5                      6                      7                      8