


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

1                      2                      3                      4                      5                      6                      7                      8

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 09/04/23'		

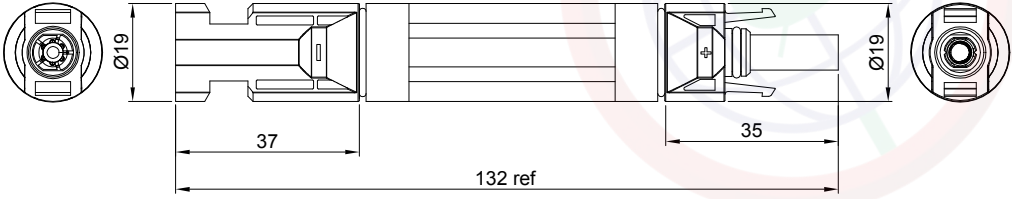

- Notes:**
- Specifications:**
- Contact Resistance: 0.5mΩ Max.
  - Insulation Resistance: 1000MΩ Min.
  - Dielectric Withstanding Voltage: 6000V AC(rms) For 1 Minute.
  - Current Rating: 10-30A.
  - Voltage Rating: 1000V DC rms.
  - Temperature: -40°C~+85°C.
  - Waterproof rated: IP65.

- Materials:**
- Insulating material: Thermoplastic,Black.
  - Contact: Red Copper,Tin plated.
  - Fingers: Beryllium Copper, Tin Plated.
  - Clip: Stainless Steel.
  - Sealing: Silicone rubber,Black&Red.

**Product Number Code:**

DS1162-22 - X X X X X

- Current Type  
10: 10A 15: 15A  
20: 20A 25: 25A  
30: 30A
- Packing Type  
P: Polybag
- Housing color  
B: Black
- Contact plating  
6: Tin
- Mounting type  
A: Adaptor



(Series Image-Reference Only)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	Photovoltaic Fuse Connector			
X.	±0.60	X.	±5°	UNITS	mm					
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1162-22 SERIES			
.XX	±0.25	.XX	±2°							
DRAWING TYPE		CUSTOMER			<b>晨翔电子有限公司</b> <b>CONNFLY CONNELY ELECTRONIC CO. LTD</b>					
SCALE		1:1	SHEET						1 OF 1	
DRAWING NO.		C-DS1162-22-XXXXX-A								

1                      2                      3                      4                      5                      6                      7                      8