
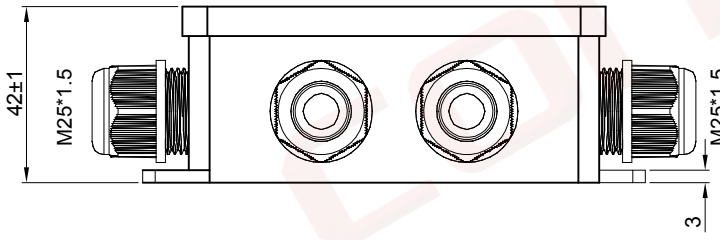


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

1 2 3 4 5 6 7 8


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 05/29/23'		

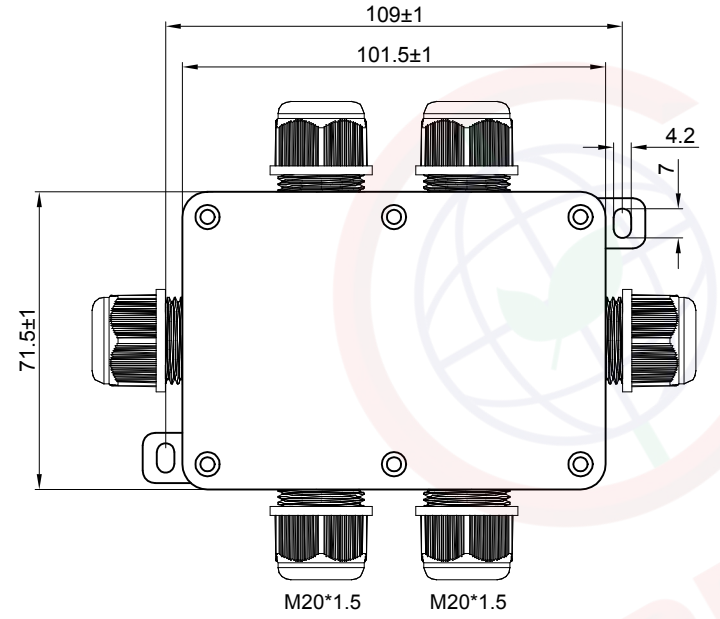

(Series Image-Reference Only)

NOTES:
 Temp. Range: -40°C~+85°C.
 Protection grade: IP68.
 Cable OD: Ø5~Ø8mm, Ø9~Ø12mm, Ø10~Ø14mm.
Materials:
 Insulator: PA66, Black.
 Sealings: Silicone, Yellow.
 Screw: Steel.
 Product Number Code:

DS1169-05 - X X X X
 Wire Ring Type
 1: Ø5~Ø8mm
 2: Ø9~Ø12mm
 3: Ø10~Ø14mm
 Main Body Color
 B: Black
 Box Type
 F: Female
 No. of Holes
 6: 6Pos

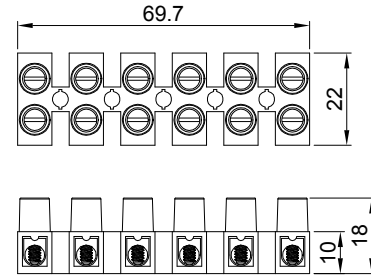

Screw Terminal Blocks

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	Waterproof Wire Junction Box 1 To 5 Type
X.	±0.60	X.	±5°	UNITS	mm	SHEET	DS1169-05 SERIES
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1169-05 SERIES
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONNELY CONNELY ELECTRONIC CO. LTD			
DRAWING TYPE		CUSTOMER					
SCALE		1:1	SHEET 1 OF 1				
DRAWING NO.		C-DS1169-05-XXXX-A					

1 2 3 4 5 6 7 8