


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

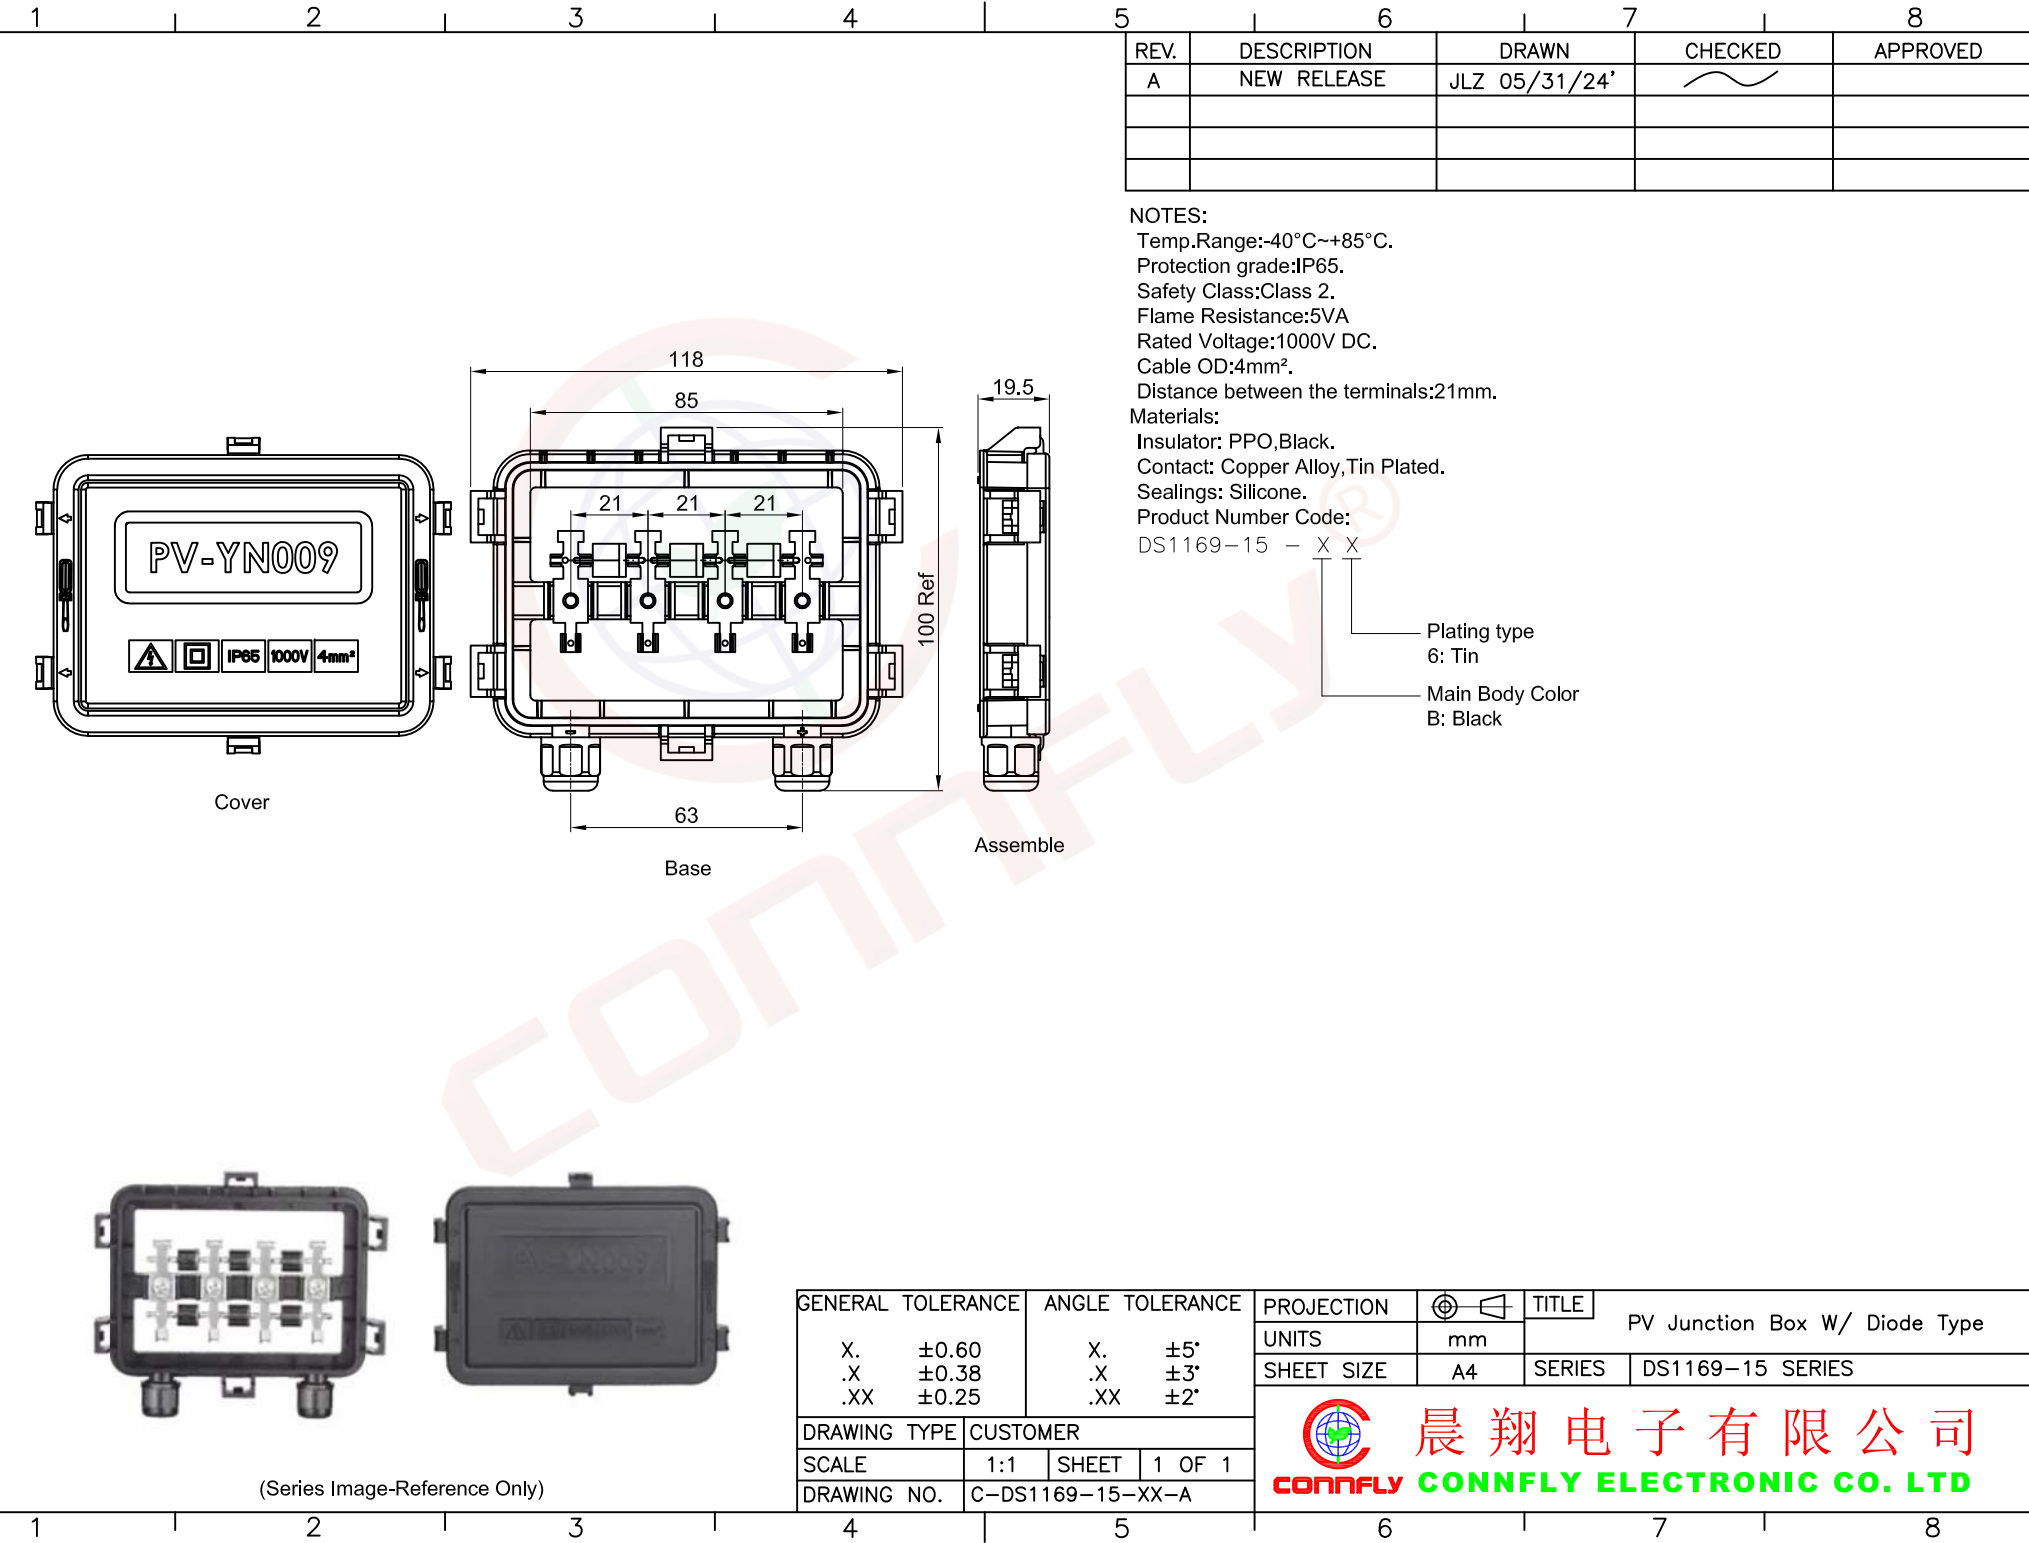

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 05/31/24'		

NOTES:
 Temp.Range:-40°C~+85°C.
 Protection grade:IP65.
 Safety Class:Class 2.
 Flame Resistance:5VA
 Rated Voltage:1000V DC.
 Cable OD:4mm².
 Distance between the terminals:21mm.
Materials:
 Insulator: PPO,Black.
 Contact: Copper Alloy, Tin Plated.
 Sealings: Silicone.
 Product Number Code:
 DS1169-15 - X X

Plating type
 6: Tin
 Main Body Color
 B: Black

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X.	±0.60	X.	±5°	UNITS	mm	PV Junction Box W/ Diode Type	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1169-15 SERIES
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONNELY CONNELY ELECTRONIC CO. LTD			
DRAWING TYPE		CUSTOMER					
SCALE		1:1	SHEET 1 OF 1				
DRAWING NO.		C-DS1169-15-XX-A					

(Series Image-Reference Only)