

Dept / Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 06/02/23'		
B	Drawing Update	WPY 10/27/25'		

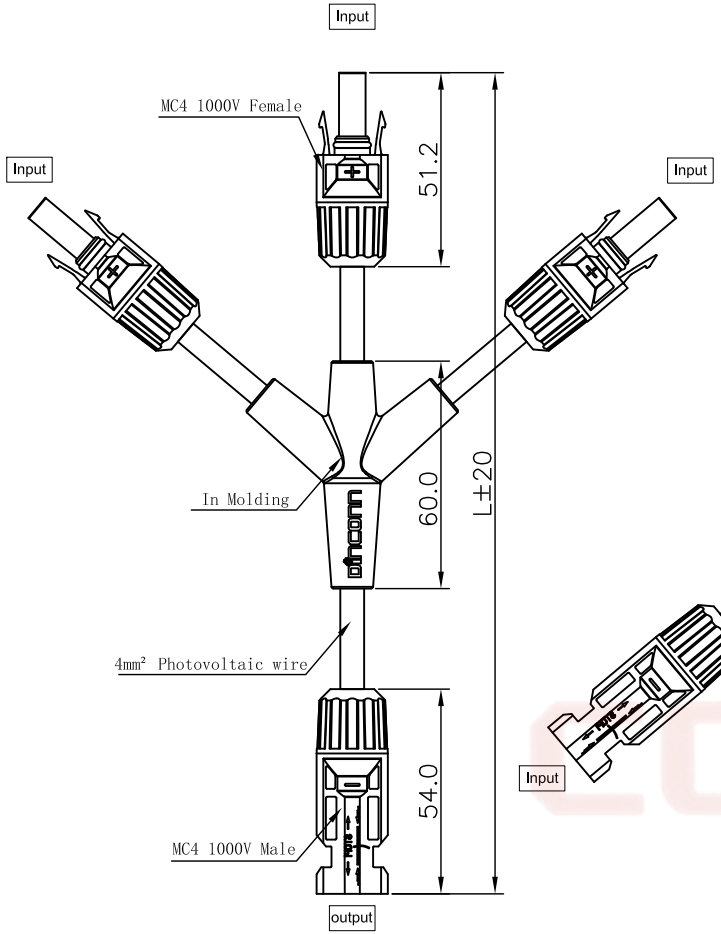

3M1F: 3Female+1Male

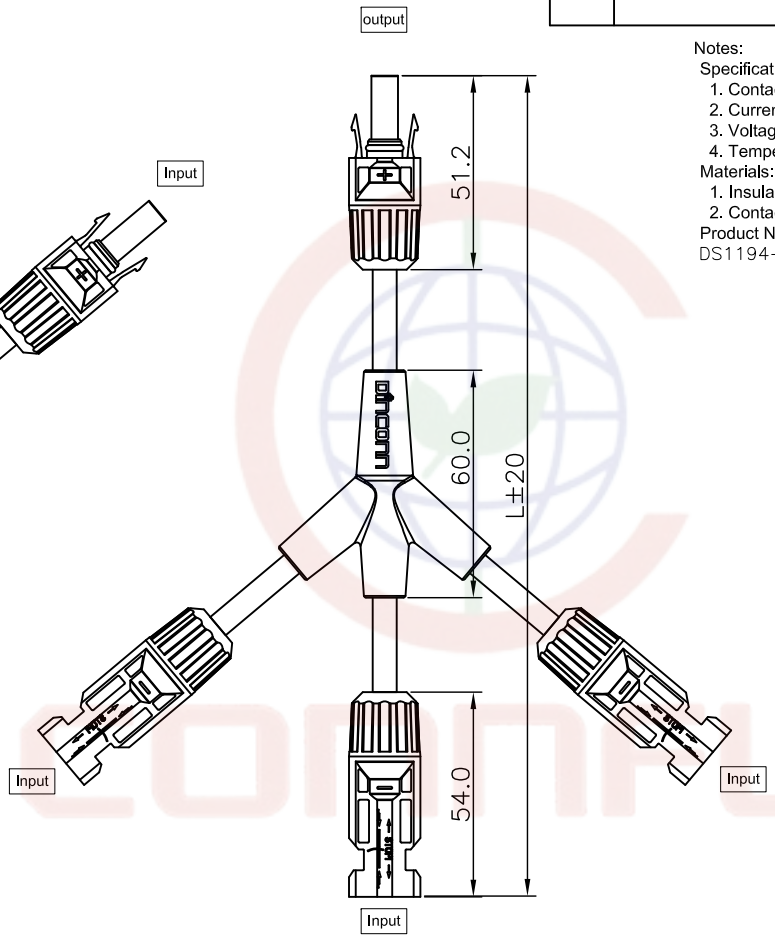

3M1F: 3Male+1Female

Notes:
Specifications:
1. Contact Resistance: 0.5mΩ Max.
2. Current Rating:30A.
3. Voltage Rating:1000V AC rms.
4. Temperature: -40°C~+90°C.

Materials:
1. Insulating material:Thermoplastic Black.
2. Contact material: Red Copper,Tin plated.

Product Number Code:

DS1194-02 – X X X X X

- Wire length(Dim L)
  350: 350mm
  .....
- Cable color
  B: Black
  R: Red
- Contact plating
  6: Tin
- Housing color
  B: Black
- No. of contacts
  3F1M: 3Female+1Male
  3M1F: 3Male+1Female
  1T3: 3F1M+3M1F



(Series Image-Reference Only)

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1194-02-XXXXX-B		

PROJECTION		TITLE	PV Y Branch Connector - 1 to 3
UNITS	mm		
SHEET SIZE	A4	SERIES	DS1194-02 SERIES

晨翔电子有限公司
CONNFLY ELECTRONIC CO. LTD

The information provided herein is from CONNFLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein including but not limited to trademarks, patents, copyrights, trade secrets, and technical know-how are owned exclusively by CONNFLY or its affiliates. Unauthorized use or modification is strictly prohibited without prior written consent from CONNFLY. All intellectual properties provided herein are for reference purposes only and does not constitute authorization of its use in any format or manner. CONNFLY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.