

Dept	Qty
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 06/09/22'		

B	QA	1
	QC	1
	QE	1

C


D

F

F

G

H

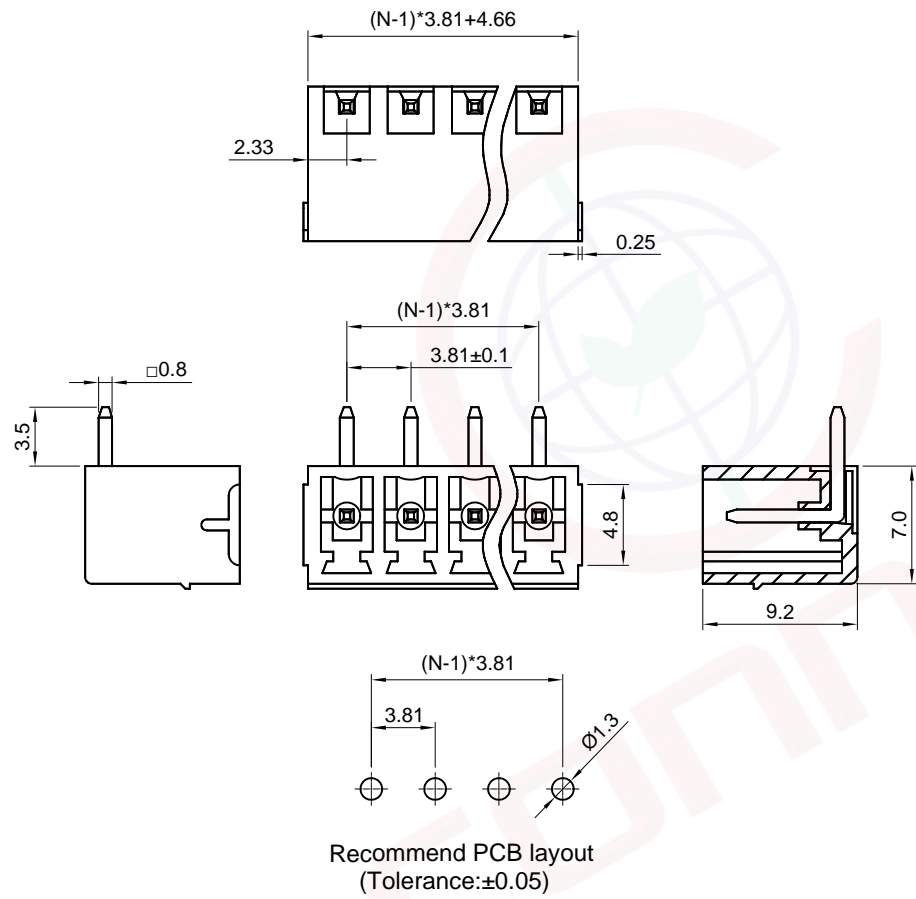

(Series Image-Reference Only)

NOTES:  
 Standard UL  
 Rated voltage:300V  
 Rated current:8A  
 Temp.Range:-40°C~+105°C  
 Pitch:3.81mm  
 Poles:2~24P  
 Materials:  
 Contact: Copper Alloy,Tin plated.  
 Insulator: Nylon.  
 Product Number Code:

DS1159-06 - X X X  
 Contact plating  
 6: Tin  
 Housing color  
 G:Green .....  
 No.of contacts  
 2-24


GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X.	±0.60	X.	±5°	UNITS	mm	3.81mm Pluggable Terminal Block R/A Type	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1159-06 SERIES
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONNELY ELECTRONIC CO., LTD			
DRAWING TYPE		CUSTOMER					
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.		C-DS1159-06-XXX-A					

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.



1                      2                      3                      4                      5                      6                      7                      8

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 06/09/22'		

A Dept  
 Qty  
 DC 1  
 ED 1  
 IE 1  
 ISO 1  
 PD 1  
 R&D 1  
 SD 1  
 QA 1  
 QC 1  
 QF 1  
 B  
 C  
 D  
 F  
 F  
 G  
 H

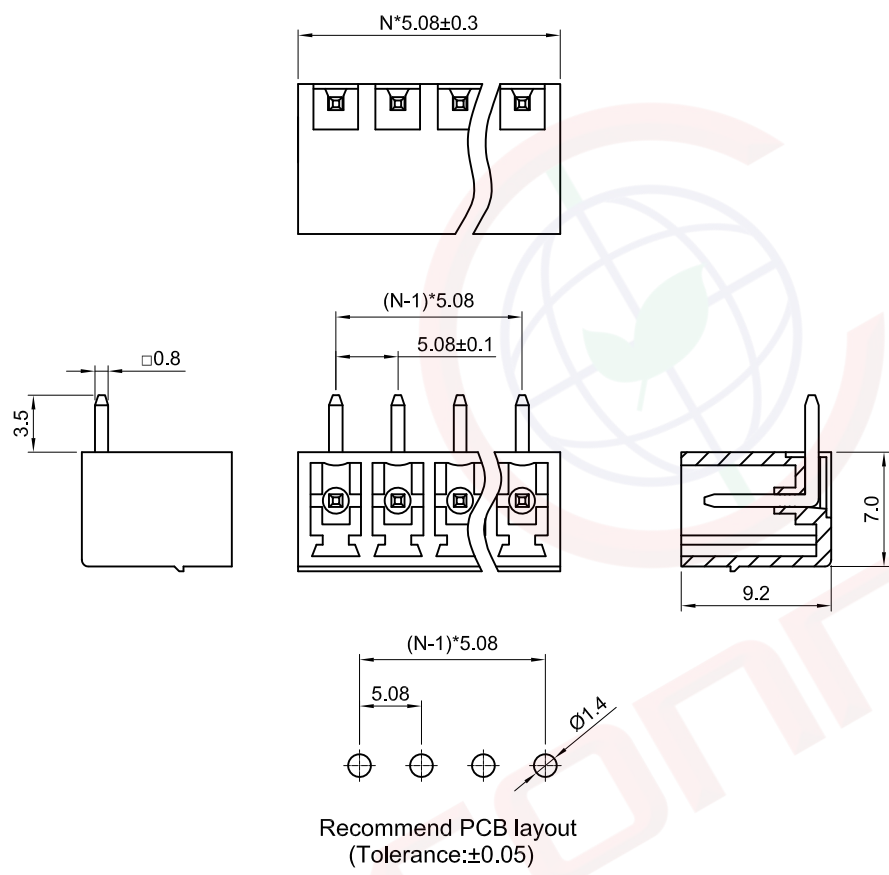

**NOTES:**  
 Standard UL  
 Rated voltage: 300V  
 Rated current: 8A  
 Temp. Range:  $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$   
 Pitch: 5.08mm  
 Poles: 2~24P  
**Materials:**  
 Contact: Copper Alloy, Tin plated.  
 Insulator: Nylon.  
 Product Number Code:

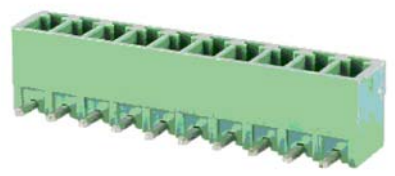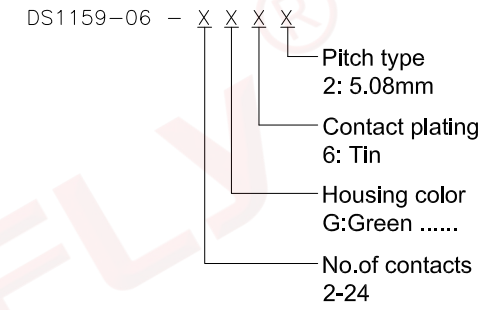

(Series Image-Reference Only)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE
X.	$\pm 0.60$	X.	$\pm 5^{\circ}$	UNITS	mm	5.08mm Pluggable Terminal Block R/A Type
.X	$\pm 0.38$	.X	$\pm 3^{\circ}$	SHEET SIZE	A4	SERIES DS1159-06 SERIES
.XX	$\pm 0.25$	.XX	$\pm 2^{\circ}$	<b>晨翔电子有限公司</b> <b>CONNELY CONNELY ELECTRONIC CO. LTD</b>		
DRAWING TYPE		CUSTOMER				
SCALE	1:1	SHEET	1 OF 1			
DRAWING NO.		C-DS1159-06-XXXX-A				

1                      2                      3                      4                      5                      6                      7                      8