



The information provided herein is from CONNPLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNPLY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNPLY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 06/15/06'		LJC 06/15/06'
B	DRAWING UPDATE	JLZ 07/21/18'		

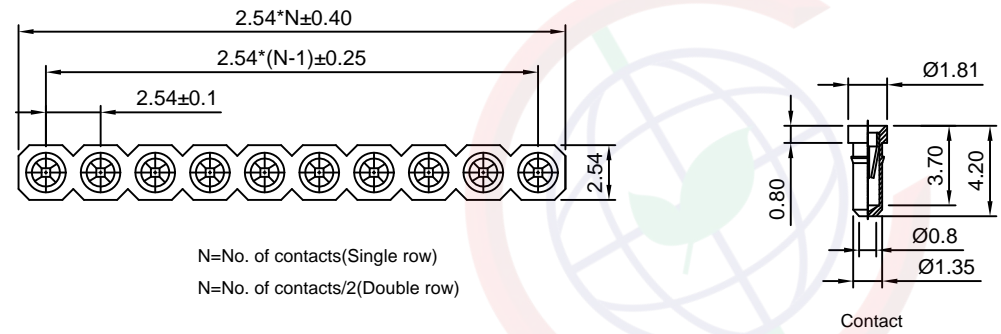

- NOTES:
- ELECTRICAL:
 - Current rating: 3Amps max.
 - Contact resistance: 20mΩ max.
 - Insulation resistance: 1000MΩ min at V=100V.
 - Operating voltage: 60V AC/DC.
 - Product number code:
DS1002-06 - X X X
 - Clip plating
 - 6: Full Tin
 - 8: Full gold flash
 - C: Full gold 3u"
 - A: Full gold 10u"
 - Pin plating
 - 6: Full Tin
 - 8: Full gold flash
 - C: Full gold 3u"
 - A: Full gold 10u"
 - No. of contacts
 - 1x1 to 1x40
 - 2x2 to 2x40

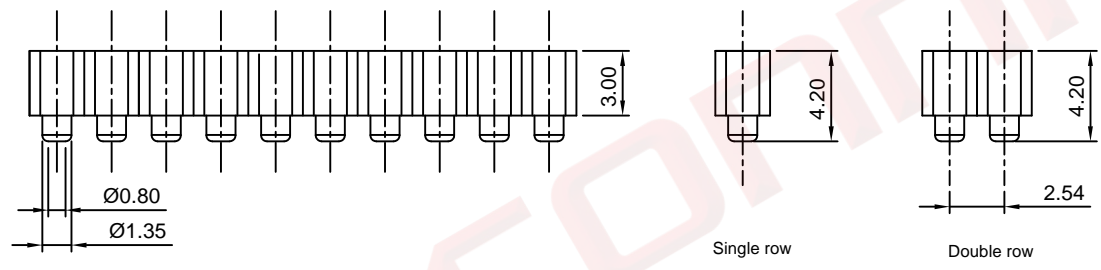

(Series Image-Reference Only)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE
X.	±0.60	X.	±5°		IC SOCKET PITCH 2.54mm
.X	±0.38	.X	±3°	mm	PIN LENGTH 4.20mm
.XX	±0.25	.XX	±2°	SHEET SIZE	A4
DRAWING TYPE		CUSTOMER		SERIES	DS1002-06 SERIES
SCALE		1:1	SHEET	1 OF 1	
DRAWING NO.		C-DS1002-06-XXXXX-B			

晨翔电子有限公司
CONNPLY ELECTRONIC CO. LTD