
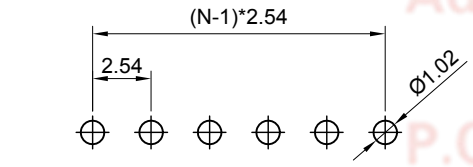
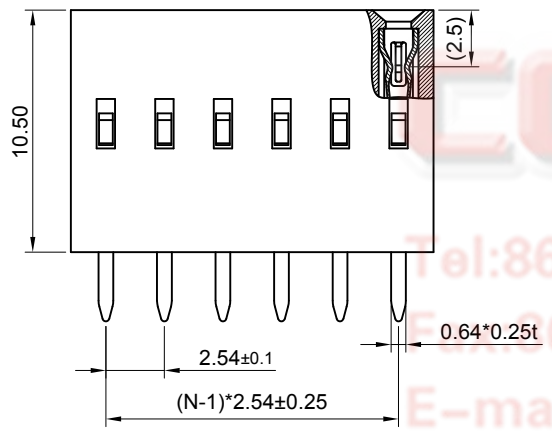
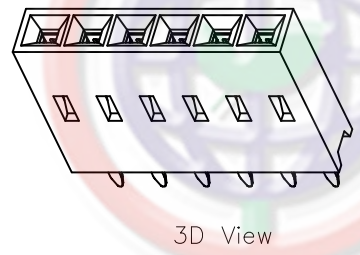


Dept	Qty
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 03/01/18'		

The information provided herein is from CONNPLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNPLY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNPLY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

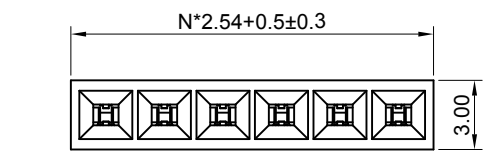

NOTES:

- CHARACTERISTICS:
  - CONTACT RESISTANCE: 20mΩ Max.
  - DIELECTRIC WITHSTANDING VOLTAGE: 600V AC(rms) FOR 1 MINUTE.
  - INSULATION RESISTANCE: 1000MΩ Min.
  - CURRENT RATING:3A.
- ENVIRONMENT CHARACTERISTICS:
  - TEMPERATURE: -40°C~+105°C.
- MATERIALS
  - CONTACT MATERIAL: COPPER ALLOY.
  - CONTACT PLATING: GOLD
  - INSULATOR MATERIALS: PBT, BLACK, UL94-V0.
- PRODUCT NUMBER CODE:  
DS1023-58 - X X X X X X

- Packing type  
T: Tray
- Housing color  
B: Black
- Contact plating  
8: Full gold flash
- Mounting type  
V: V/T Type
- Connector type  
S: Socket
- No. of contacts  
1x2-1x20

Tel:86-574-63508787  
E-mail:sale@connfly.com  
http://www.connfly.com  
Add:East Industry Zone Kuang Yan  
Town Cixi Ningbo China  
P.C:315333

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	2.54mm Female Header Single Row V/T H=10.5mm Big Window Type		
X.	±0.60	X.	±5°	UNITS	mm	SERIES	DS1023-58 SERIES		
.X	±0.38	.X	±3°						
.XX	±0.25	.XX	±2°						
DRAWING TYPE		CUSTOMER		晨翔电子有限公司 CONNFLY CONNPLY ELECTRONIC CO. LTD					
SCALE		1:1	SHEET						1 OF 1
DRAWING NO.		C-DS1023-58-XXXXX-A							