



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	HP 15/06/05		
B	DRAWING UPDATE	JLZ 07/26/17'		

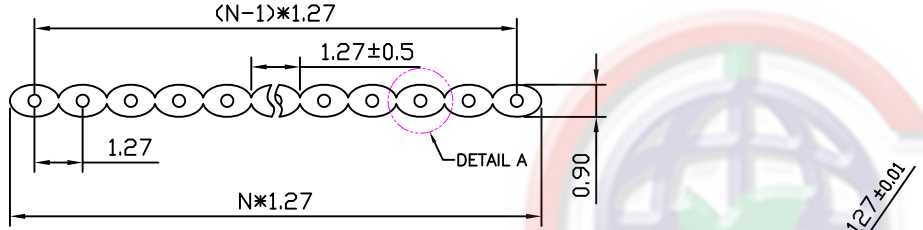

N=Positions

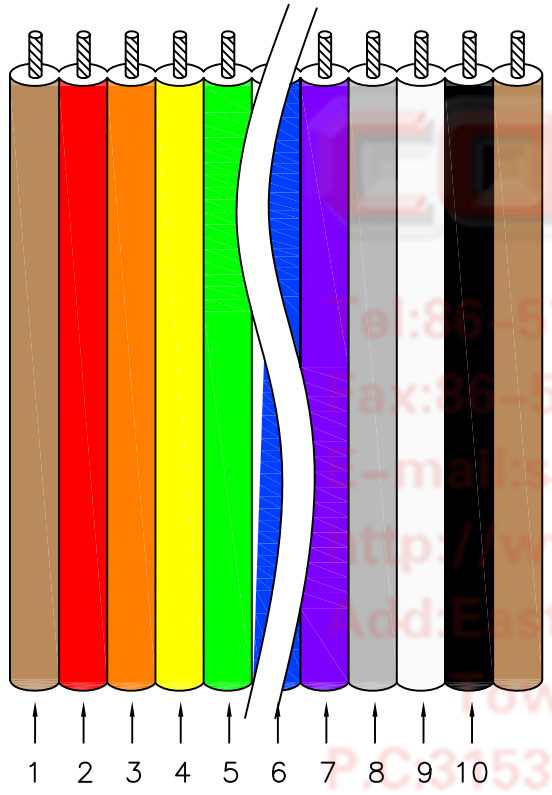

detail A  
3:1

NOTES:

- Color  
.Insulation: MULTI COLOUR
- SPECIFICATION  
. Rating: 300V 1A  
. Conductor Size: 28AWG  
. Insulation resistance: 100MΩ/km min.  
. Dielectric withstanding voltage: 1000 VAC 1 minute.  
. Temperature range: -20°C to +80°C.
- APPLICATION  
. Internal wiring of computers, electronic exchanges, measurement control devices, business machines, communication devices, and other electronic equipment.

4. Product Number Code

DS1058 -X X X - X

- Packing Specifications  
30.0:30M/Reel  
30.5:30.5M/Reel  
61.0:61M/Reel
- Wire AWG  
28: 28AWG
- Cable color  
M: Multi color
- No. of positions  
10 ~ 64

Pin	Cable color	Pin	Cable color
1	Brown	6	Blue
2	Red	7	Purple
3	Orange	8	Gray
4	Yellow	9	White
5	Green	10	Black

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION		TITLE	FLAT CABLE MUTLI COLOR		
X. ±0.60	X. ±5°	UNITS	mm	SHEET	A4		
.X ±0.38	.X ±3°	SHEET SIZE	A4	SERIES	DS1058		
.XX ±0.25	.XX ±2°	晨翔电子有限公司 <b>CONFLY CONNPLY ELECTRONIC CO. LTD</b>					
DRAWING TYPE	CUSTOMER						
SCALE	1:1						SHEET
DRAWING NO.	C-DS1058-XXX-X-B						