
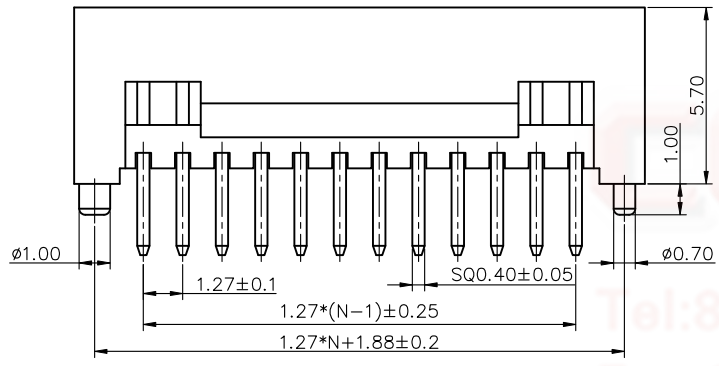




REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 09/04/08'	~	LJC 09/04/08'
B	HOUSING CHANGE	JLZ 07/06/15'	HZW 07/06/15'	LJC 07/06/15'
C	DRAWING UPDATE	JLZ 01/31/18'	~	

NOTES:

- MATERIAL
  - INSULATOR: THERMOPLASTIC(UL 94V-0).
  - CONTACT MATERIAL: COPPER ALLOY.
- SPECIFICATION
  - CURRENT RATING: 1.0 Amp.
  - INSULATION RESISTANCE: 1000MΩ Min.
  - DIELECTRIC WITHSTANDING: 300VAC.
  - CONTACT RESISTANCE: 20mΩ Max.
  - OPERATING TEMPERATURE: -40°C TO+105°C.
- PART NUMBER: DS1064-15
- PRODUCT NUMBER CODE:  
 DS1064-15 - X X X X X - X  
 PLATING LEVEL  
 3A: 3A LEVEL  
 PACKING TYPE  
 A: POLYBAG  
 B: TUBE  
 HOUSING COLOR  
 B: BLACK  
 CONTACT PLATING  
 8: FULL GOLD FLASH  
 6: FULL TIN  
 MOUNTING TYPE  
 V: STRAIGHT TYPE  
 No.OF CONTACTS  
 06 08 10 14 20 24 26 30  
 32 34 40 44 50 60 64 80

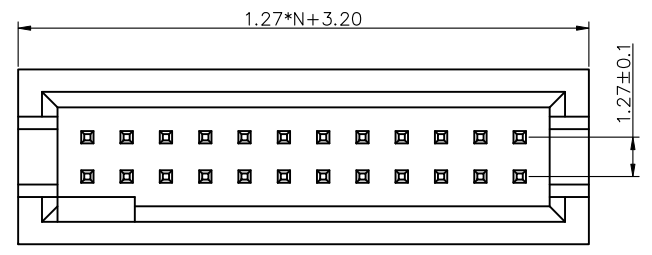

N=No. of contact/2

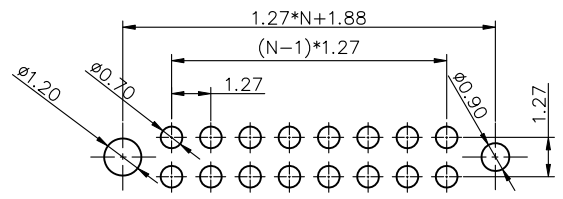

RECOMMEND PCB LAYOUT  
(TOLERANCE=±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	BOX HEADER PITCH 1.27mm	
X.	±0.60	X.	±5°	UNITS	mm		V/T TYPE	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1064-15 SERIES	
.XX	±0.25	.XX	±2°	晨翔电子有限公司 <b>CONNFLY CONNFLY ELECTRONIC CO. LTD</b>				
DRAWING TYPE		CUSTOMER						
SCALE	1:1	SHEET	1 OF 1					
DRAWING NO.		C-DS1064-15-XXXXX-X-C						