
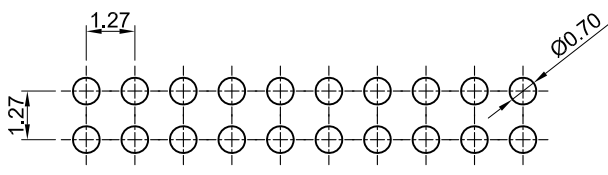
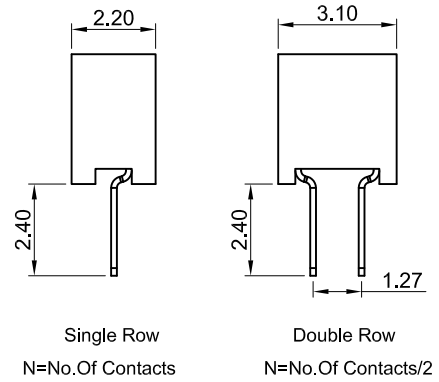
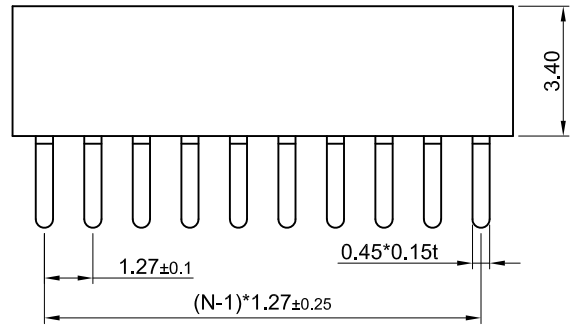



Dept	Qty	REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
DC	1	A	NEW RELEASE	JLZ 09/02/17'	HZW 09/02/17'	LJC 09/02/17'
ED	1	B	DRAWING UPDATE	JLZ 07/09/19'		
IE	1					
ISO	1					
PD	1					
R&D	1					
SD	1					
QA	1					
QC	1					
QE	1					

Notes:
Specifications:
 1. Contact Resistance: 30mΩ Max.
 2. Insulation Resistance: 500MΩ Min.
 3. Dielectric Withstanding Voltage: 300V AC(rms) For 1 Minute.
 4. Current Rating:1A.
 5. Voltage Rating:125V.
 6. Temperature: -40°C~+105°C.
Materials:
 1. Contact Material: Copper Alloy.
 2. Contact Plating: Gold Plating Over Nickel.
 3. Insulator Material: High Temp,Black,UL94-V0.
Product Number Code:

DS1065-22 - X X X X X

- X — Mounting type
- V: V/T type
- Housing color
- B: Black
- Contact plating
- 8: Full gold flash
- Connector type
- S: Socket
- No.of contacts
- 1x2-1x40
- 2x2-2x40

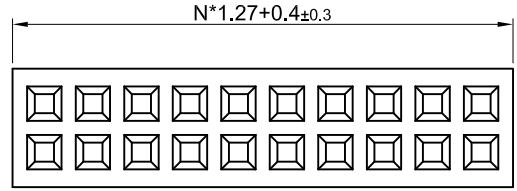

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	1.27mm Female Header
X.	±0.60	X.	±5°	UNITS	mm	V/T Type H=3.4mm	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1065-22 SERIES
.XX	±0.25	.XX	±2°				
DRAWING TYPE		CUSTOMER					
SCALE		1:1	SHEET	1 OF 1			
DRAWING NO.		C-DS1065-22-XXXXX-B					