

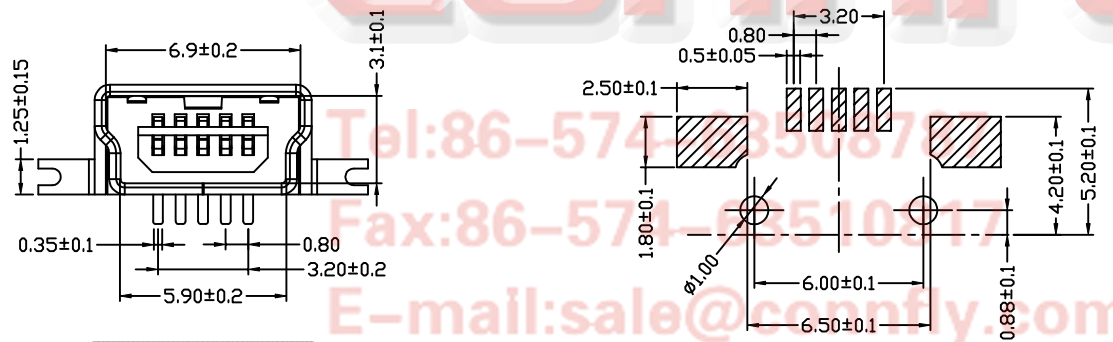


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 03/23/16'		

NOTES:  
 1. SPECIFICATIONS  
 Housing: Thermoplastics,UL94V-0  
 Contact: Copper Alloy  
 Shell: Copper Alloy  
 Voltage Current Rating:1.5 AMP. 30V AC  
 Insulation Resistance:1000MΩ Min.  
 Contact Resistance: 30 mΩ Max.  
 Dielectric Withstanding Voltage:500V AC  
 Temperature Range: -55℃ to +85℃  
 2. PRODUCT NUMBER CODE:

DS1104-06 - X X X X X X X  
 Packing type  
 R: Tape on reel  
 B: Tube  
 Pick up support  
 S: W/ Pick up  
 SHELL PLATING  
 6: Full tin  
 Color of housing  
 B: Black  
 Contact Plating  
 0: Selective gold flash  
 Mounting type  
 S: SMT type  
 Connector type  
 S: Socket

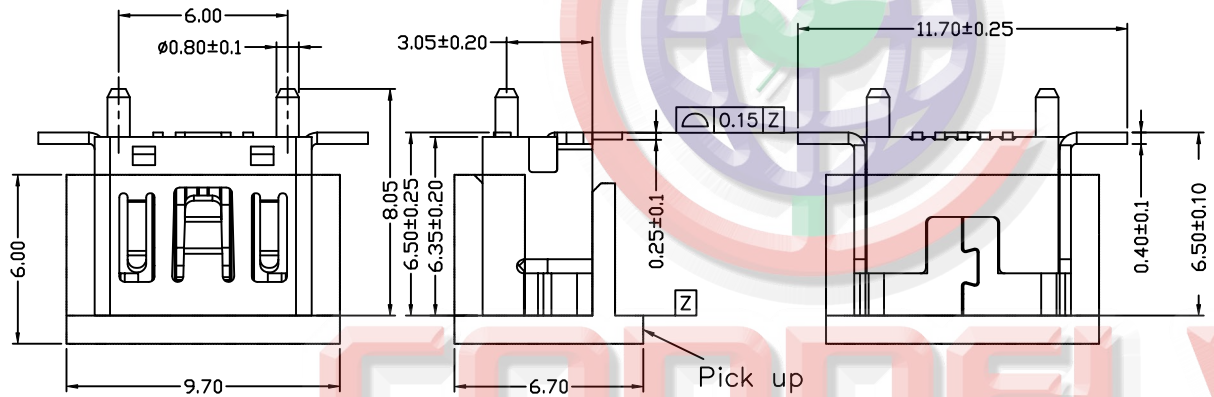

Recommended PCB Layout

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER
SCALE	1:1 SHEET 1 OF 1
DRAWING NO.	C-DS1104-06-XXXXXX-A

PROJECTION	TITLE
	MINI USB 5 pos. RECEPTACLE SMT TYPE
UNITS	mm
SHEET SIZE	A4
SERIES	DS1104-06 SERIES

晨翔电子有限公司  
 CONNFLY ELECTRONIC CO., LTD

Tel:86-574-835087  
 Fax:86-574-83510217  
 E-mail:sale@connfly.com  
<http://www.connfly.com>  
 Add:East Industry Zone KuangYan  
 Town Cixi Ningbo China  
 P.C:315333