

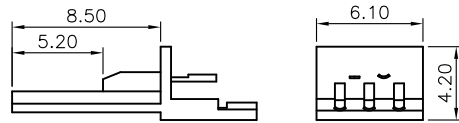


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 05/09/05'		LJC 05/09/05'
B	DELETE HOOD	JLZ 11/10/15'		

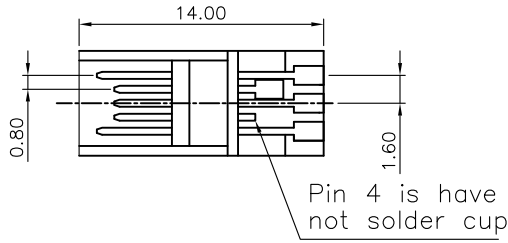

Housing with contact

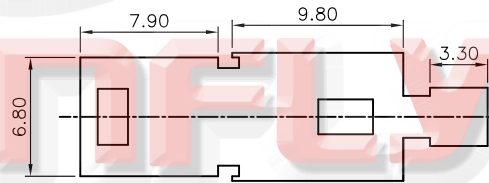

NOTES:

1.SPECIFICATIONS



- .CURRENT RATING: 0.5A/pin Max.
- .VOLTAGE RATING: 30V(DC)
- .DIELECTRIC WITHSTANDING VOLTAGE: 100VAC 1 minute.
- .CONTACT RESISTANCE: 50mΩ Max.
- .INSULATION RESISTANCE: 100MΩ Min
- .TEMPERATURE RANGE: -40°C+105°C

2.MATERIALS



- .HOUSING: PBT.
- .SHELL: STEEL
- .CONTACT: COPPER ALLOY

3.PRODUCT NUMBER CODE:

- DS1105-01 - X B X X
- Contact plating
    - 0: Selective gold flash
    - C: Selective 3u" gold
    - 3: Selective 30u" gold
  - Shell plating
    - 6: Tin
    - N: Nickel
    - 8: Full gold
  - Color of housing
    - B: BLACK
  - Products series
    - DS1105-01

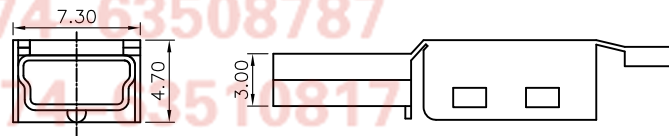

Down shell



Upper shell

Tel:86-574-63508787  
 Fax:86-574-63510817  
 E-mail:sale@connfly.com  
 http://www.connfly.com  
 Add:East Industry Zone KuangYan  
 Town Cixi Ningbo China  
 P.C:315333

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE
X.	±0.60	X.	±5°	UNITS	mm	MINI USB 5PIN B TYPE MALE SOLDER
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES DS1105-01 SERIES
.XX	±0.25	.XX	±2°			
DRAWING TYPE		CUSTOMER		晨翔电子有限公司 <b>CONNFLY CONNFLY ELECTRONIC CO. LTD</b>		
SCALE		1:1	SHEET 1 OF 1			
DRAWING NO.		C-DS1105-01-XBXX-B				