

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 09/09/14'		


NOTES:

- SPECIFICATIONS
 - .CURRENT RATING: 0.5A/pin Max.
 - .VOLTAGE RATING: 30V(DC)
 - .DIELECTRIC WITHSTANDING VOLTAGE: 100VAC 1 minute.
 - .CONTACT RESISTANCE: 50mΩ Max.
 - .INSULATION RESISTANCE: 100MΩ Min
 - .TEMPERATURE RANGE: -40°C--+105°C

- MATERIALS
 - .HOUSING: PLASTIC
 - .SHELL: STEEL
 - .CONTACT: COPPER ALLOY

- PRODUCT NUMBER CODE:
DS1105-03 - X X X X

- Packing Type
R: Tape On Reel
T: Tray
- Contact plating
0: Selective gold flash
C: Selective 3u" gold
- Shell Plating
N: Nickel
8: Full Gold
- Color of housing
B: Black

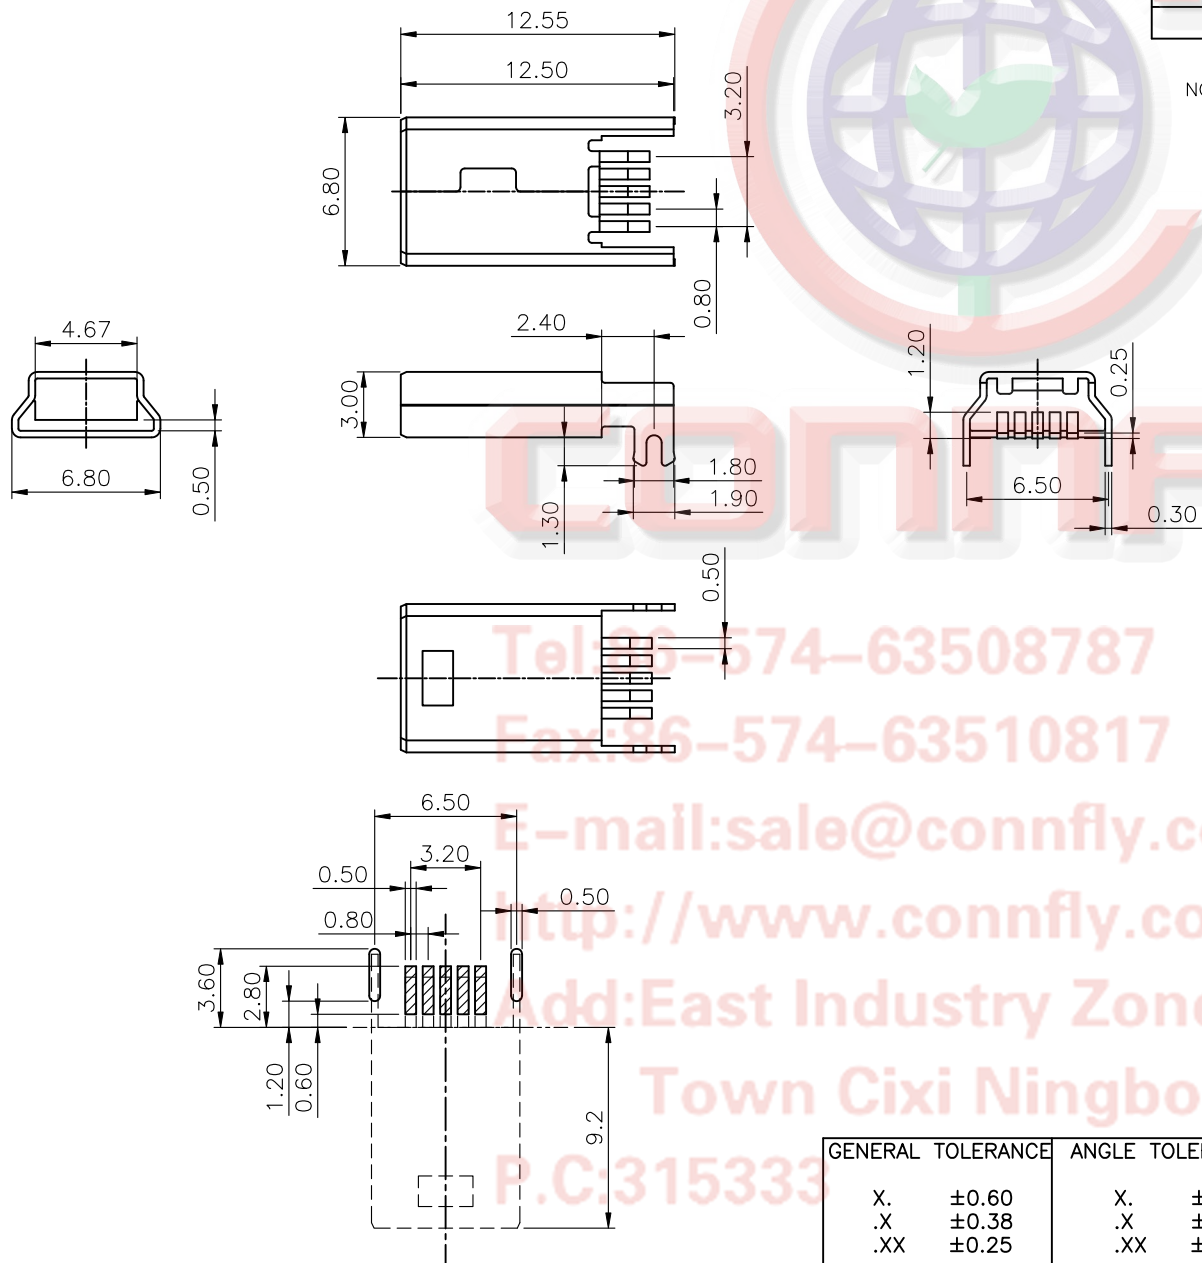

Tel: 86-574-63508787
 Fax: 86-574-63510817
 E-mail: sale@connfly.com
 http://www.connfly.com
 Add: East Industry Zone KuangYan
 Town Cixi Ningbo China
 P.C: 315333

RECOMMEND PCB LAYOUT
(TOLERANCE ±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE
X.	±0.60	X.	±5°	UNITS	mm	MINI USB 5PIN B TYPE MALE
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES DS1105-03 SERIES
.XX	±0.25	.XX	±2°			
DRAWING TYPE		CUSTOMER		晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD		
SCALE		SHEET				
DRAWING NO.		1 OF 1				
		C-DS1105-03-XXXX-A				