
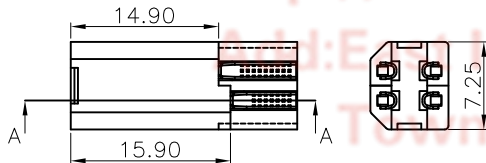



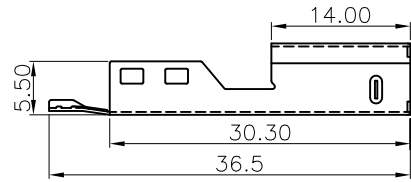
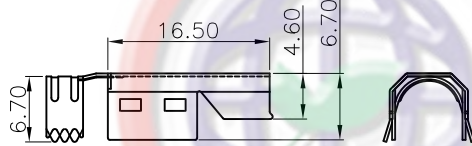


Dept
 Qty
 DC 1
 ED 1
 IE 1
 ISO 1
 PD 1
 R&D 1
 SD 1
 QA 1
 QC 1
 QF 1

The information provided herein is from CONNFLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNFLY or its affiliates. Unauthorized use or modification is strictly prohibited. CONNFLY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	HP 23/06/05'		LJC 23/06/05'
B	DRAWING UPDATE	JLZ 09/06/18'		

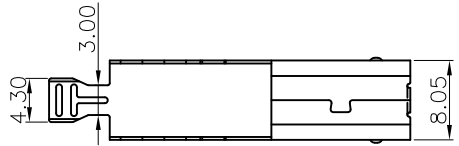

NOTES:

- SPECIFICATIONS
 - Contact Resistance: 30mΩ max
 - Insulator Resistance: 1000MΩ min.
 - Current Rating: 30V DC 1.5 A max
 - Dielectric withstanding voltage: AC500V For 1 minute
 - Contact: Copper alloy
 - Housing: PBT.

2. PRODUCT NUMBER CODE:

DS1108 - X X X

- Contact Plating
 - 0: Selective gold flash
 - C 3u" gold
 - 3: 30u" gold
- Shell Plating
 - 6: Tin
 - N: Nickel
 - 8: Full gold
- Color of Housing
 - W: White
 - B: Black

Tel:86-574-63508787
 Fax:86-574-63510817
 E-mail:sale@connfly.com
 http://www.connfly.com
 Industry Zone KuangYan
 Cixi Ningbo China
 P.C:315332

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	USB-B Male Solder		
X.	±0.60	X.	±5°	UNITS	mm	SHEET SIZE	A4	SERIES	DS1108 SERIES
.X	±0.38	.X	±3°	晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD					
.XX	±0.25	.XX	±2°						
DRAWING TYPE		CUSTOMER							
SCALE		1:1	SHEET	1 OF 1					
DRAWING NO.		C-DS1108-XXX-B							