


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

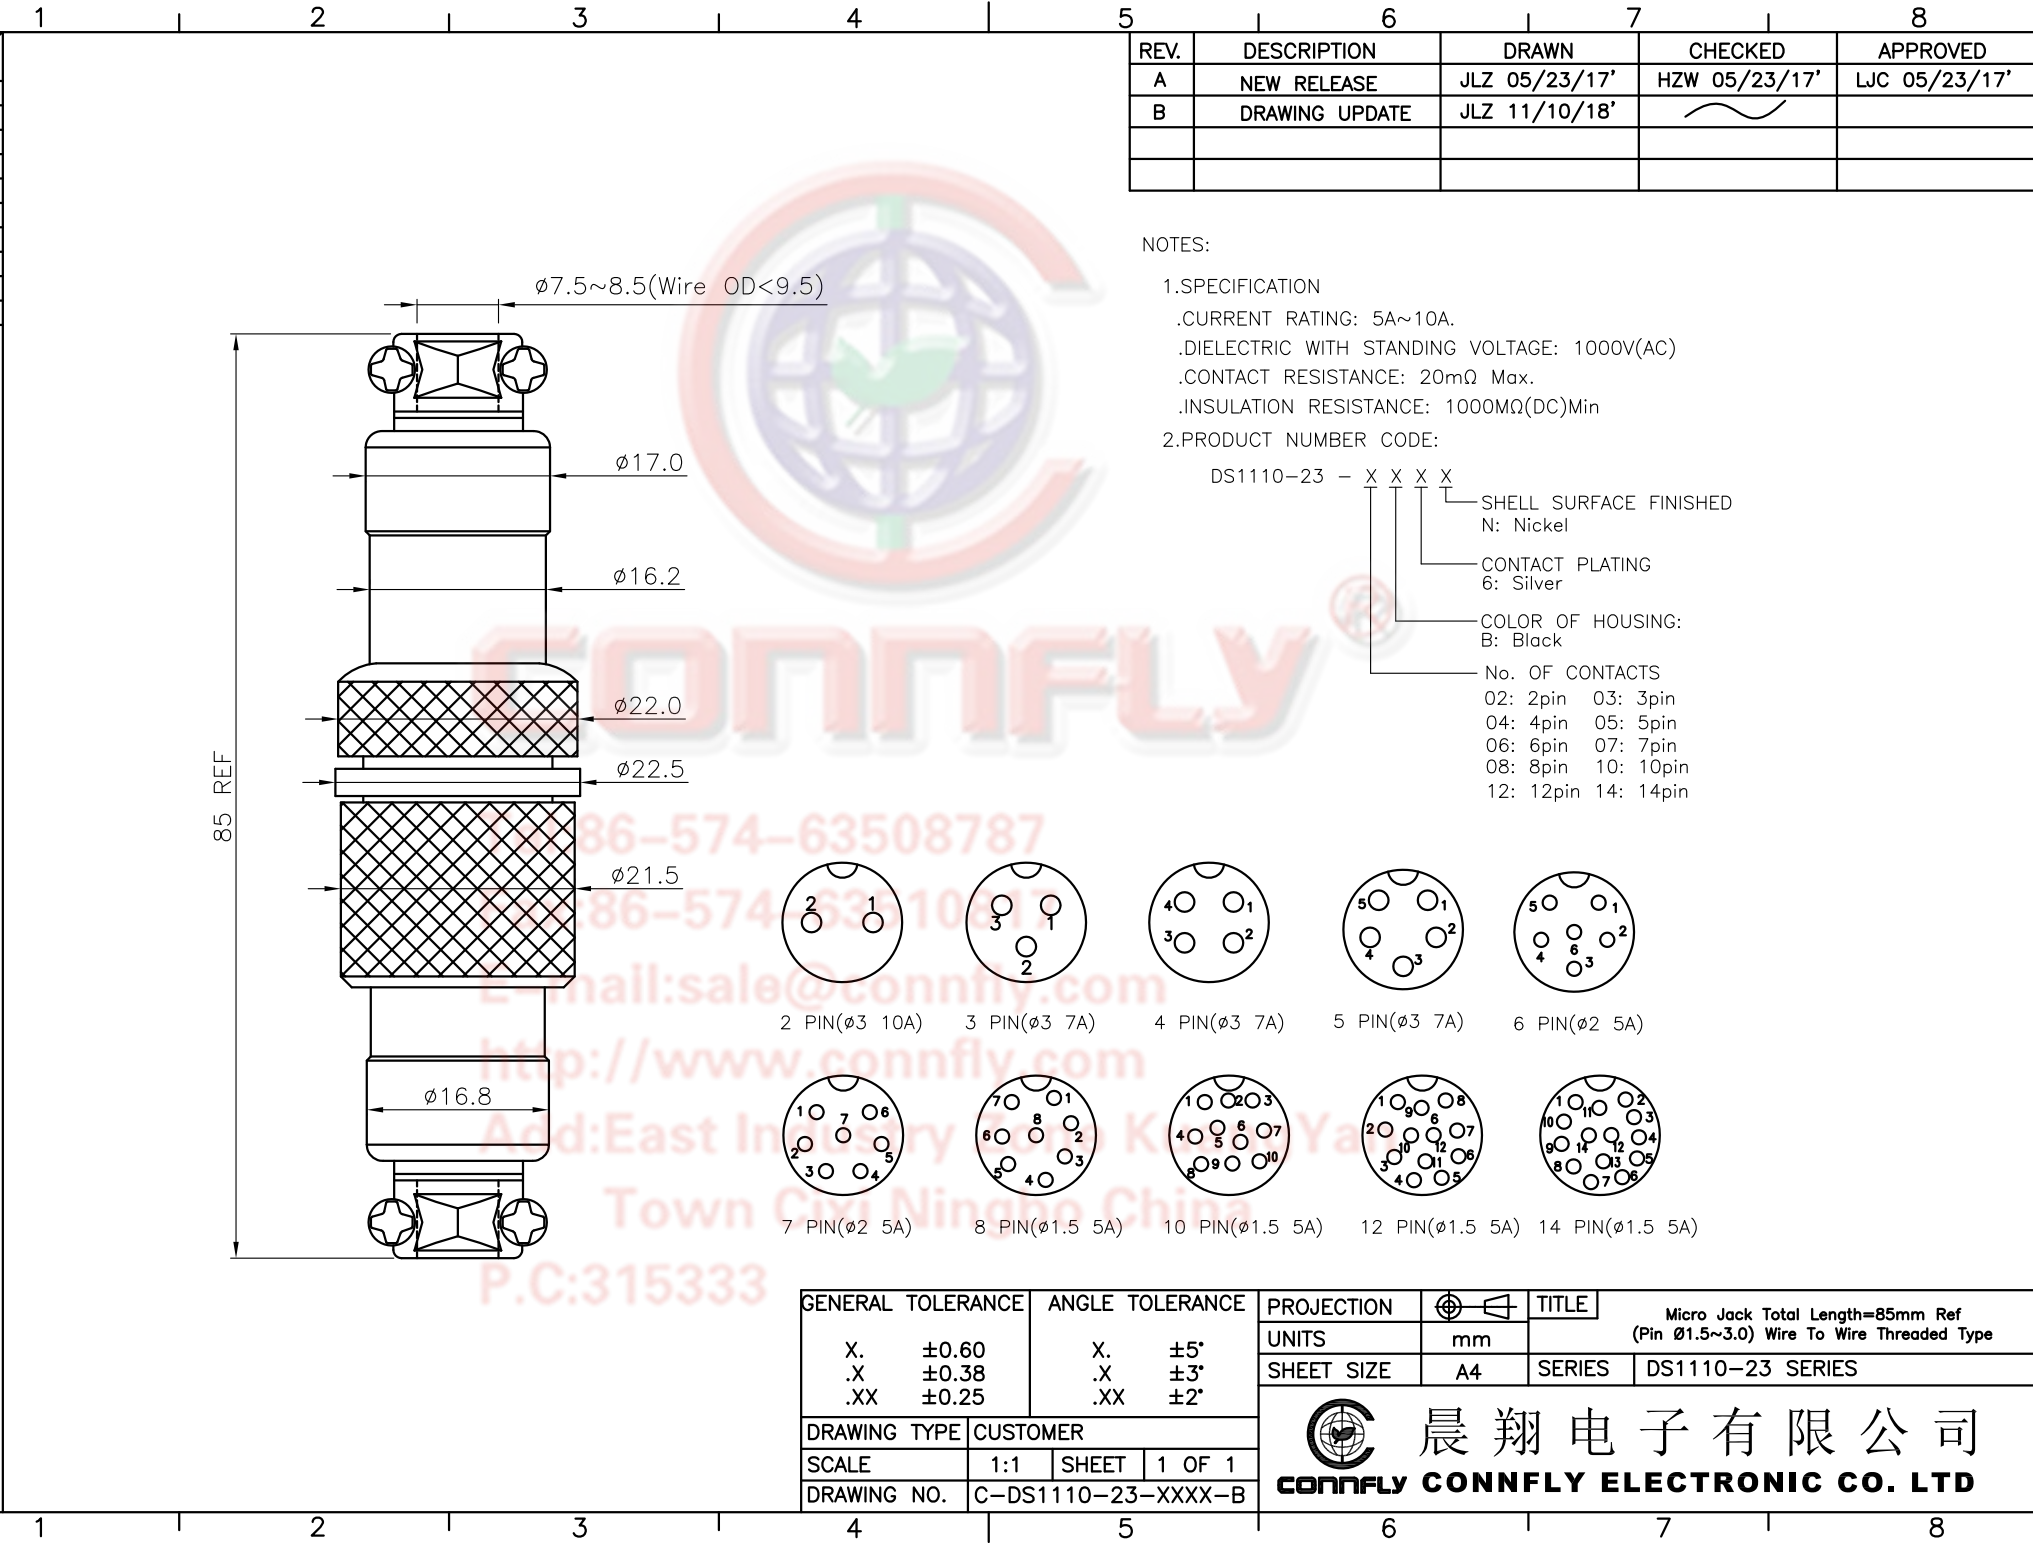

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 05/23/17'	HZW 05/23/17'	LJC 05/23/17'
B	DRAWING UPDATE	JLZ 11/10/18'		

NOTES:

1.SPECIFICATION  
 .CURRENT RATING: 5A~10A.  
 .DIELECTRIC WITH STANDING VOLTAGE: 1000V(AC)  
 .CONTACT RESISTANCE: 20mΩ Max.  
 .INSULATION RESISTANCE: 1000MΩ(DC)Min

2.PRODUCT NUMBER CODE:  
 DS1110-23 - X X X X  
 X: SHELL SURFACE FINISHED  
 N: Nickel  
 X: CONTACT PLATING  
 6: Silver  
 X: COLOR OF HOUSING:  
 B: Black  
 X: No. OF CONTACTS  
 02: 2pin 03: 3pin  
 04: 4pin 05: 5pin  
 06: 6pin 07: 7pin  
 08: 8pin 10: 10pin  
 12: 12pin 14: 14pin

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE
X.	±0.60	X.	±5°		Micro Jack Total Length=85mm Ref (Pin Ø1.5~3.0) Wire To Wire Threaded Type
.X	±0.38	.X	±3°	mm	
.XX	±0.25	.XX	±2°	A4	SERIES DS1110-23 SERIES
DRAWING TYPE		CUSTOMER		晨翔电子有限公司 <b>CONNFLY CONNELY ELECTRONIC CO. LTD</b>	
SCALE		1:1	SHEET 1 OF 1		
DRAWING NO.		C-DS1110-23-XXXX-B			