



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 06/28/06'		

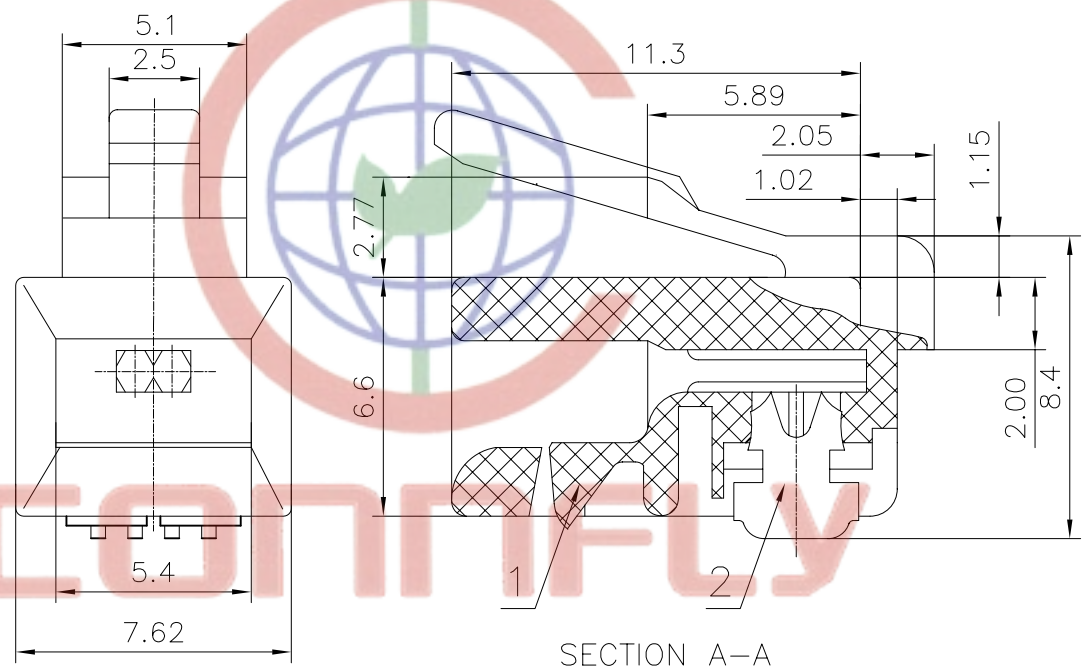

SECTION A-A

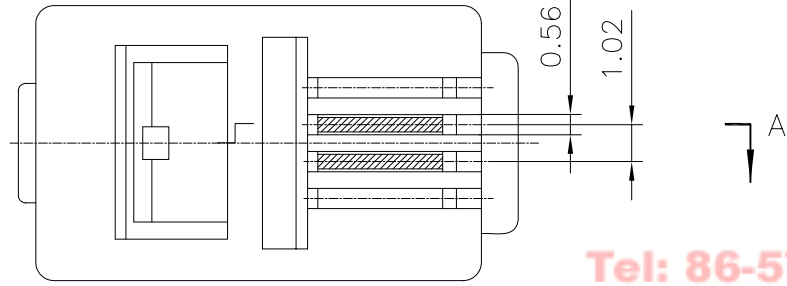

SPECIFICATION

1. Insulation Resistance:1000MQ Min.
2. Withstand Voltage:500V AC/Minute.
3. Durability:600 Cycles Min.
4. Contact resistance:50mΩ max.
5. Product Number Code:

DS1121-03 - X X X X

- Housing Color  
T:Transparent
- Contact Plating  
0:Gold Flash 15:15u''Au  
3:3u''Au 30:30u''Au  
6:6u''Au
- No.Of Contacts  
2:4p2c
- Connector Type  
P:Plug
- Series No.  
DS1121-03

Tel: 86-574-63508787


Fax: 86-574-63510817

No.	PART NAME	Q'TY	MATERIAL	REMARK
(2)	BLADE	2	Copper alloy	GOLD PLATING
(1)	HOUSING	1	PC	UL94 V-0 OR 94 V-2

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5'
.X	±0.38	.X	±3'
.XX	±0.25	.XX	±2'

DRAWING TYPE	CUSTOMER
SCALE	1:1
DRAWING NO.	C-DS1121-03-XXXX

PROJECTION	TITLE
UNITS mm	Plug-4P2C SQUARE TYPE
SHEET SIZE A4	SERIES DS1121-03 SERIES


**晨翔电子有限公司**  
**CONNFLY CONNFLY ELECTRONIC CO. LTD**

P.C.:31521