


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 08/23/07'	~	

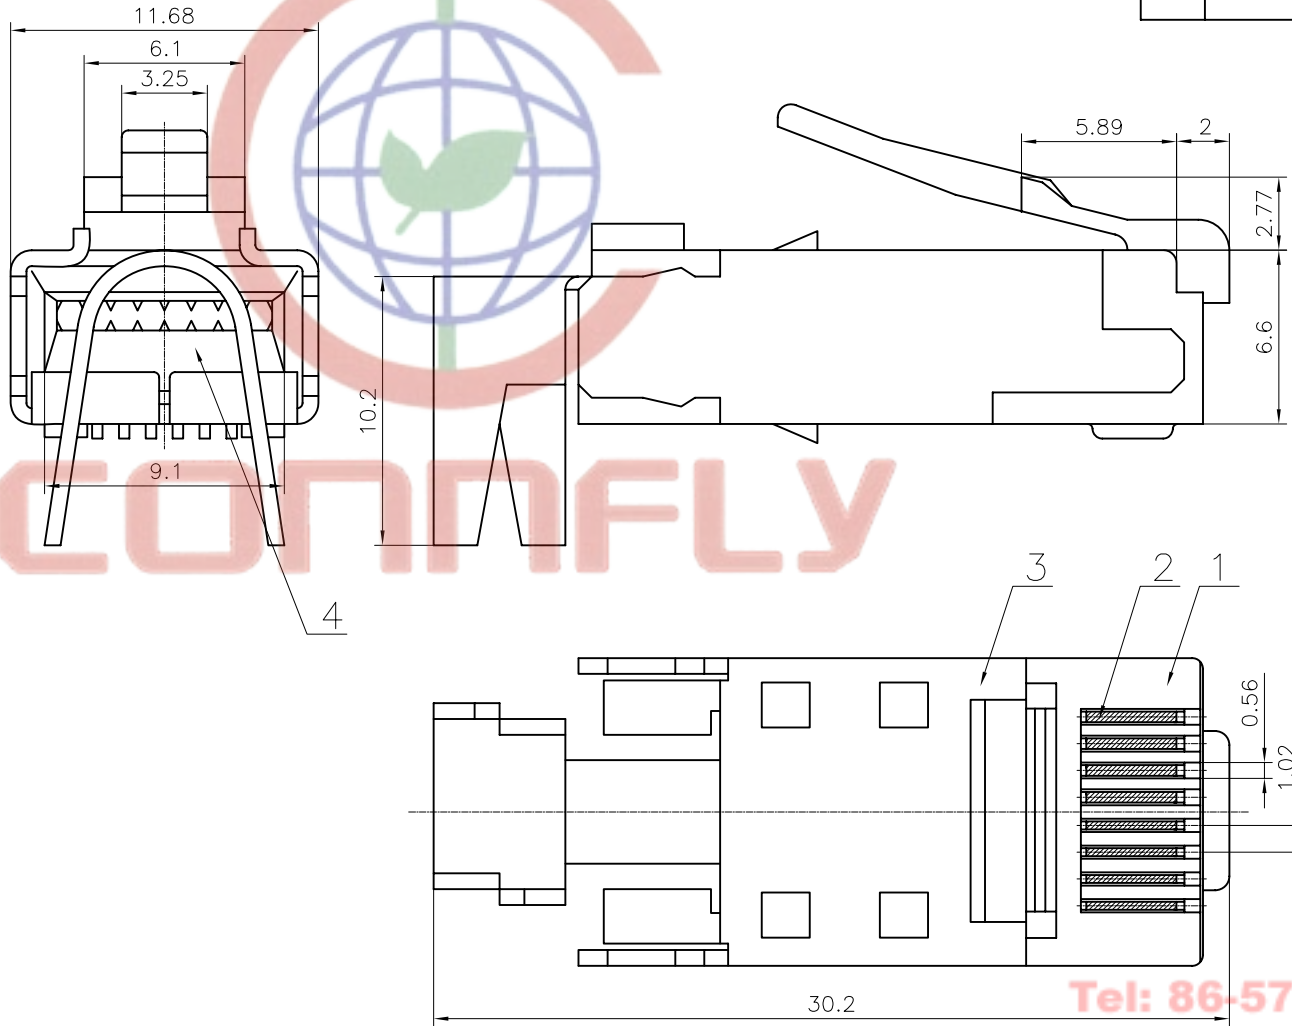

SPECIFICATION

1. Insulation Resistance:1000MΩ Min.
2. Withstand Voltage:500V AC/Minute.
3. Durability:600 Cycles Min.
4. Contact resistance:50mΩ max.
5. Product Number Code:

DS1123-21 - X X X X X

- Shell Plating
N:Nickel
- Housing Color
T:Transparent
- Contact Plating
0:Gold Flash 15:15u''Au
3:3u''Au 30:30u''Au
6:6u''Au
- No.Of Contacts
8:8p8c
- Connector Type
P:Plug
- Series No.
DS1123-21

Tel: 86-574-63508787

Fax: 86-574-63510817

(4)	COVER	1	PC	UL94 V-0 OR 94 V-2
(3)	SHELL	1	Copper alloy	NICKEL PLATING
(2)	BLADE	8	Copper alloy	GOLD PLATING
(1)	HOUSING	1	PC	UL94 V-0 OR 94 V-2
No.	PART NAME	Q'TY	MATERIAL	REMARK

GENERAL TOLERANCE

X. ±0.60
.X ±0.38
.XX ±0.25

ANGLE TOLERANCE

X. ±5'
.X ±3'
.XX ±2'

PROJECTION	TITLE
UNITS	PLUG 8P8C SQUARE WITH COVER & SHELL(CLAMP TYPE)
SHEET SIZE	SERIES DS1123-21 SERIES

DRAWING TYPE	CUSTOMER
SCALE	1:1 SHEET 1 OF 1
DRAWING NO.	C-DS1123-21-XXXX



晨翔电子有限公司

CONNFLY CONNFLY ELECTRONIC CO. LTD