





REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 08/01/16'	HZW 08/01/16'	LJC 08/01/16'
B	DRAWING UPDATE	JLZ 05/31/18'	~	

NOTES:

- ELECTRICAL CHARACTERISTICS:
  - CONTACT RESISTANCE: 20mΩ Max.
  - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
  - INSULATION RESISTANCE: 1000MΩ Min.
  - VOLTAGE RATING:125V.
  - CURRENT RATING:1.5A.
- ENVIRONMENT CHARACTERISTICS:
  - TEMPERATURE: -40°C~+85°C.
- MATERIALS
  - CONTACT MATERIAL: COPPER ALLOY.
  - CONTACT PLATING: GOLD.
  - INSULATOR MATERIALS: PBT/Nylon BLACK.
- PRODUCT NUMBER CODE:

DS1129-06- X X X X X - X

- Shell Type
- X:W/O Shrapnel
- Housing Materials
- P:PBT
- N:Nylon
- Contact Plating
- 0:Gold Flash
- 3:3u" Au
- 6:6u" Au
- Housing Color
- B:Black
- No.Of Contacts
- 8:10p8c
- 4:10p4c(2.3.4.7)
- Connector Type
- S:Socket

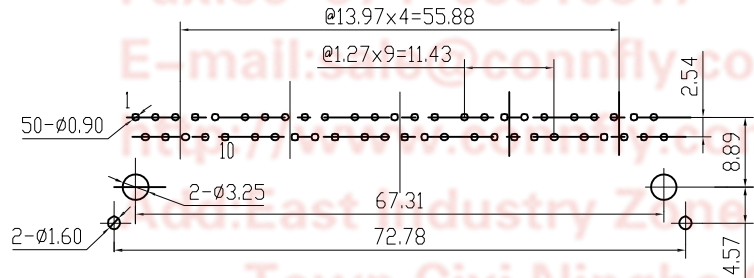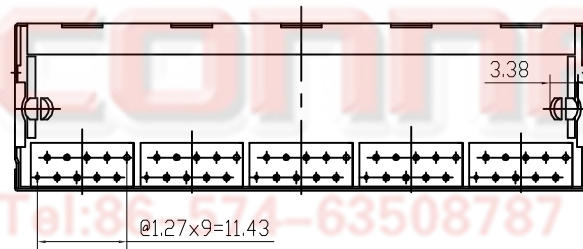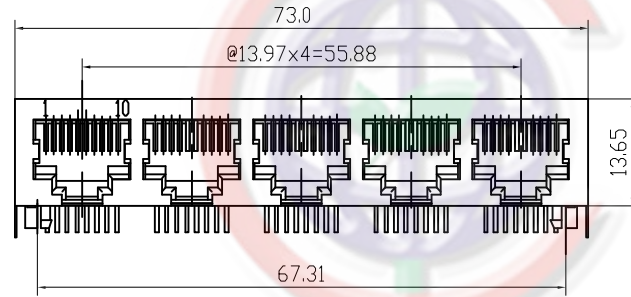


PC BOARD LAYOUT  
THICKNESS=1.6mm

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1129-06-XXXXX-X-B		

PROJECTION	TITLE
mm	PCB Jack 8 Positions 1*5 Port W/ Shell 4.57mm Type
SHEET SIZE	SERIES
A4	DS1129-06 SERIES

 晨翔电子有限公司  
CONNFLY CONNFLY ELECTRONIC CO. LTD