

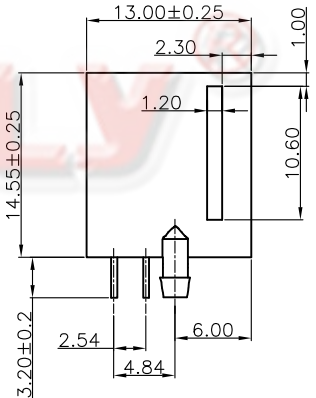


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	QHZ 02/26/18	~	

NOTES:

- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 20mΩ Max.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 500MΩ Min.
 - CURRENT RATING: 1.5A.
 - VOLTAGE RATING: 150V AC RMS.
- ENVIRONMENT CHARACTERISTICS:
 - TEMPERATURE: -40°C~+85°C.
- MATERIALS
 - CONTACT MATERIAL: COPPER ALLOY.
 - CONTACT PLATING: GOLD PLATING OVER NICKEL.
 - INSULATOR MATERIALS: THERMOPLASTIC.
- MECHANICAL
 - MATING/UNMATING FORCE: 30N MAX.
 - RETENTION STRENGTH: 50N FOR 60s±5s
 - DURABILITY: 750 CYCLES MIN.
- Product Number Code: DS1133-12- X X X X X

- Ear Support
- S: W/ Ear
- Housing Color
- A: Gray
- B: Black
- W: White
- Contact Plating
- 0: Gold Flash
- 3: 3u" Gold
- 6: 6u" Gold
- 15: 15u" Gold
- 30: 30u" Gold
- No. Of Contacts
- 6: 6P6C 4: 6P4C 2: 6P2C
- Connector Type
- S: Socket

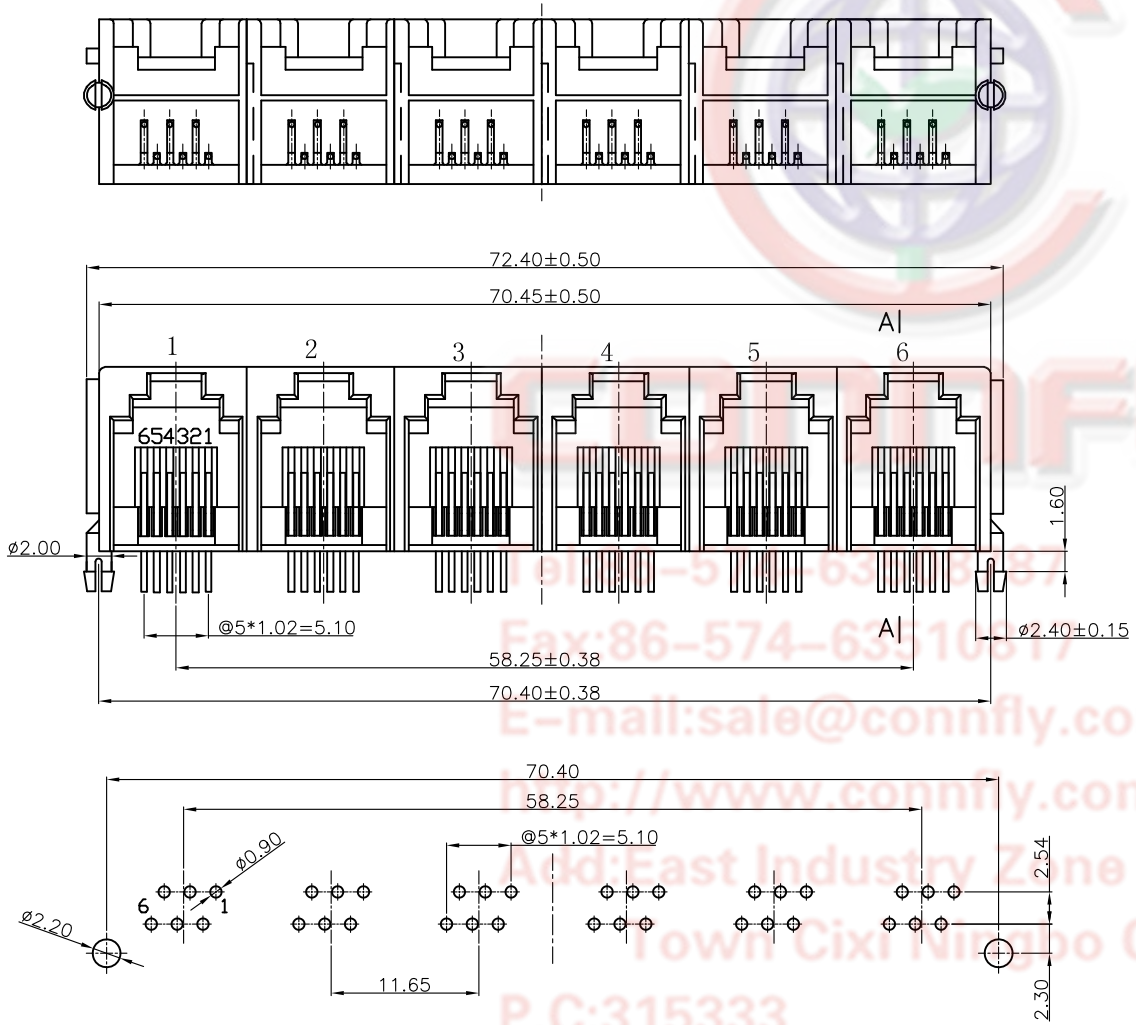

RECOMMEND PCB LAYOUT
TOLERANCE=±0.05mm

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	TITLE
X. ±0.60	X. ±5°	mm	1x6 Port 6P PCB JACK W/Ear
.X ±0.38	.X ±3°	A4	SERIES DS1133-12 SERIES
.XX ±0.25	.XX ±2°		
DRAWING TYPE	CUSTOMER	DRAWING NO. C-DS1133-12-XXXXX-A	
SCALE	1:1	SHEET	1 OF 1

晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD