
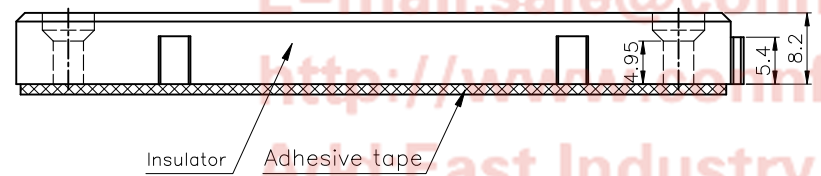


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 06/20/14'		LJC 06/20/14'
B	HOUSING COLOR CHANGE	JLZ 01/09/15'	HZW 01/09/15'	LJC 01/09/15'
C	DRAWING UPDATE	JLZ 05/10/16'	HZW 05/10/16'	LJC 05/10/16'

- Notes:
- Materials
    - 1.1. Insulator: thermoplastic
  - Specifications
    - 2.1. Temperature range: -20~+80°C.
    - 2.2. Contact resistance: 100mΩ max.
    - 2.3. Insulation resistance: 1000MΩ min.
    - 2.4. Dielectric withstanding voltage: AC 500V Per minute.
  - Product number code:

DS1136-24 - X X N X

- Housing color  
T: Transparent
- Connector type  
S: socket
- No. of contacts  
270: 270 Positions
- SERIES No.  
DS1136-24

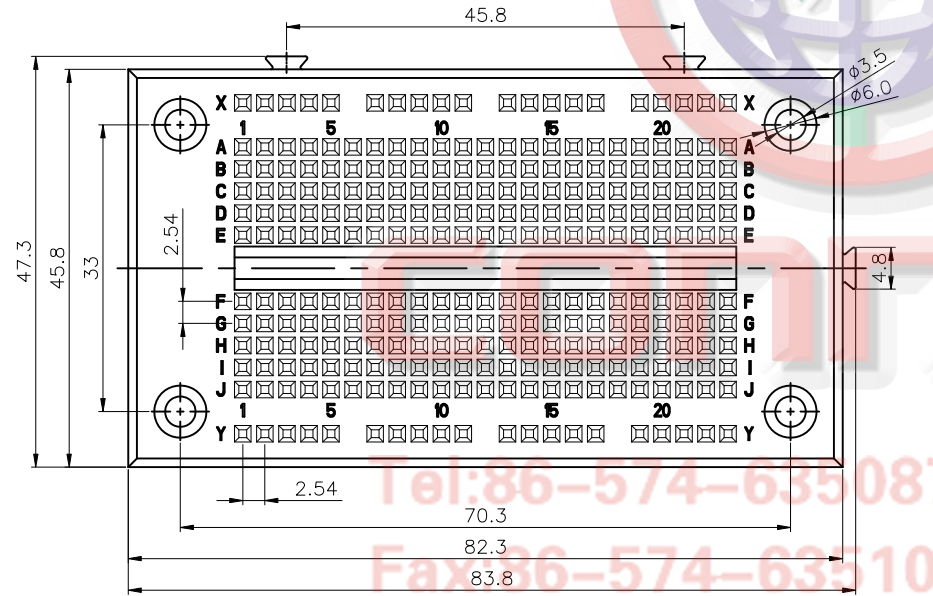

Tel: 86-574-63508787  
 Fax: 86-574-63510817  
 E-mail: sale@connfly.com  
 http://www.connfly.com  
 Add: East Industry Zone KuangYan  
 Town Cixi Ningbo China  
 P.C: 315333

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION		TITLE	2.54mm Bread Board 270 Positions		
X. ±0.60 .X ±0.38 .XX ±0.25	X. ±5° .X ±3° .XX ±2°	UNITS	mm	SHEET SIZE	A4	SERIES DS1136-24 SERIES	
DRAWING TYPE	CUSTOMER		晨翔电子有限公司 <b>CONNFLY CONNFLY ELECTRONIC CO., LTD</b>				
SCALE	1:1	SHEET					1 OF 1
DRAWING NO.	C-DS1136-24-XXXX-C						