

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 10/24/16'		

NOTES:






- Material:
Insulator: PBT With glass fiber. UL94 V-0.
Contact: Copper alloy.
- Electrical performance
Current rating: 1.9A.
Contact resistance: 20mΩ maximum.
Insulation resistance: 1000MΩ minimum.
Dielectric withstanding voltage: 500V AC(r.m.s) per 60s.
- Environment performance:
Temperature range: -40°C~+105°C.
- Product number code:

PC104-015 - X X X

- Contact plating:
1: Selective 10u"gold(contact area)
2: Selective 20u"gold(contact area)
3: Selective 30u"gold(contact area)
6: Full Matt Tin(General Mode)


Color:
B: Black
A: Gray

No. of positions:
1*2 - 1*40
2*2 - 2*40

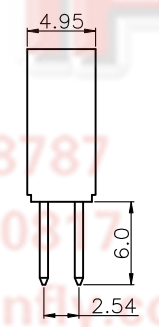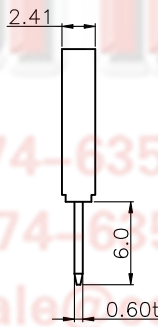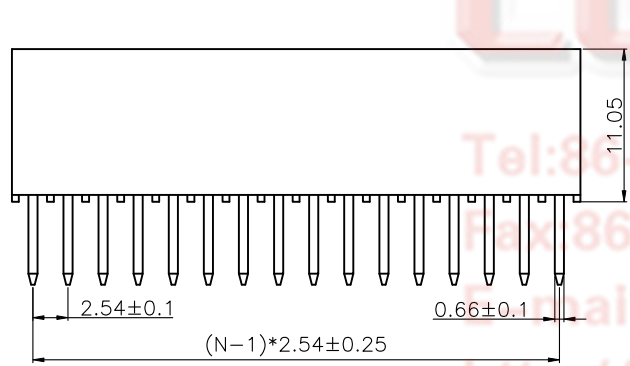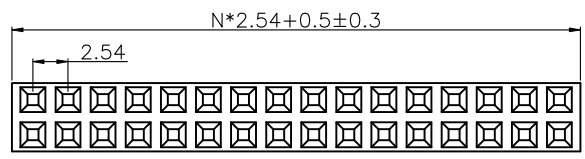

Single Row
N=No.of positions

Double Row
N=No.of positions/2

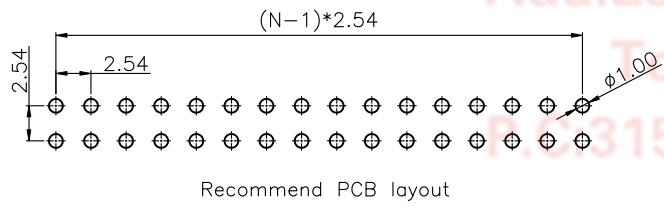

CONNFLY

Tel:86-574-63508787

Fax:86-574-63510877

E-mail:sales@connfly.com

http://www.connfly.com

Add:East Industry Zone KuangYan

Town Cixi Ningbo China

P.5315333

GENERAL TOLERANCE	ANGLE TOLERANCE
X. ±0.60	X. ±5°
.X ±0.38	.X ±3°
.XX ±0.25	.XX ±2°

PROJECTION	TITLE
	PC104 V/T Type Tail Length=6.0mm
UNITS	mm
SHEET SIZE	A4
SERIES	PC104-015 SERIES

DRAWING TYPE	CUSTOMER
SCALE	1:1 SHEET 1 OF 1
DRAWING NO.	C-PC104-015-XXX-A

晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD