
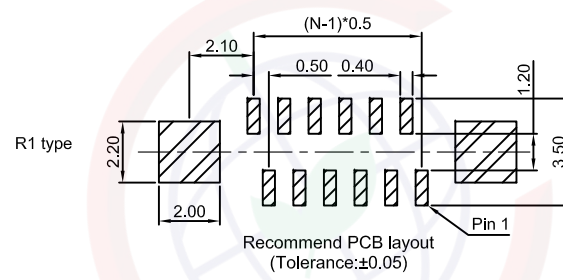
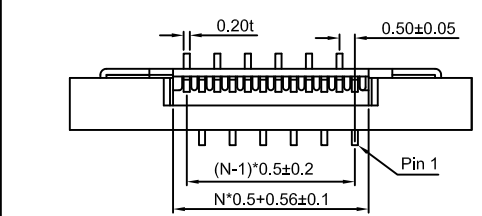
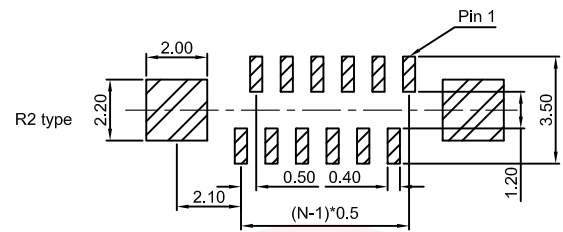






The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of this document in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

1                      2                      3                      4                      5                      6                      7                      8

Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1



Recommend PCB layout  
(Tolerance:±0.05)

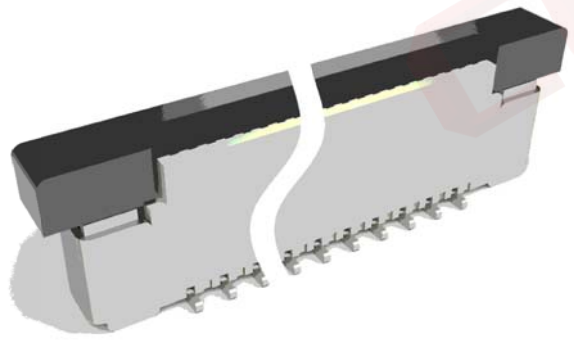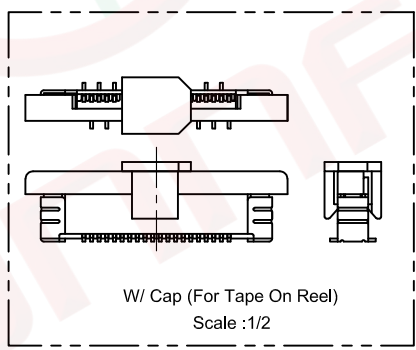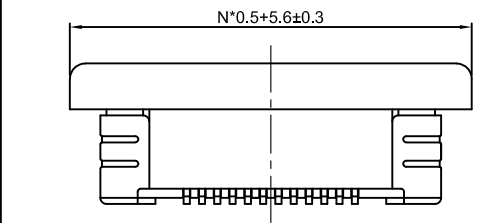

(Series Image-Reference Only)

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 09/04/08'		LJC 09/04/08'
D	DRAWING UPDATE	JLZ 03/04/19'		

NOTES:

Specifications:

- Contact resistance: 30MΩ Max.
- Insulation resistance: 100MΩ Min.
- Dielectric withstanding voltage: 250V AC(RMS) for 1 minute.
- Current rating:0.5A AC/DC.
- Voltage rating:50V AC/DC.
- Temperature: -25°C~+85°C.

Materials:

- Contact material: Copper alloy.
- Contact plating: Gold/tin plating over nickel.
- insulator material: Hight temp,ul94-v0.

Product number code:


DS1020-08- X X X X - X

- X X X X - X
- Packing type  
R: Tape on reel  
N/A code: Tube
- X X X X - X
- Bend type  
1: R1 type  
2: R2 type
- X X X X - X
- Contact plating  
T1: Tin  
8: Full gold flash
- X X X X - X
- Cover color  
B:Black
- X X X X - X
- Housing color  
V:Ivory
- X X X X - X
- No. of contacts  
04~39

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

PROJECTION		TITLE	0.50mm FPC CONNECTOR
UNITS	mm		ZIF V/T SMT TYPE
SHEET SIZE	A4	SERIES	DS1020-08 SERIES

DRAWING TYPE	CUSTOMER
SCALE	1:1 SHEET 1 OF 1
DRAWING NO.	C-DS1020-08-XXXXX-X-D



1                      2                      3                      4                      5                      6                      7                      8